

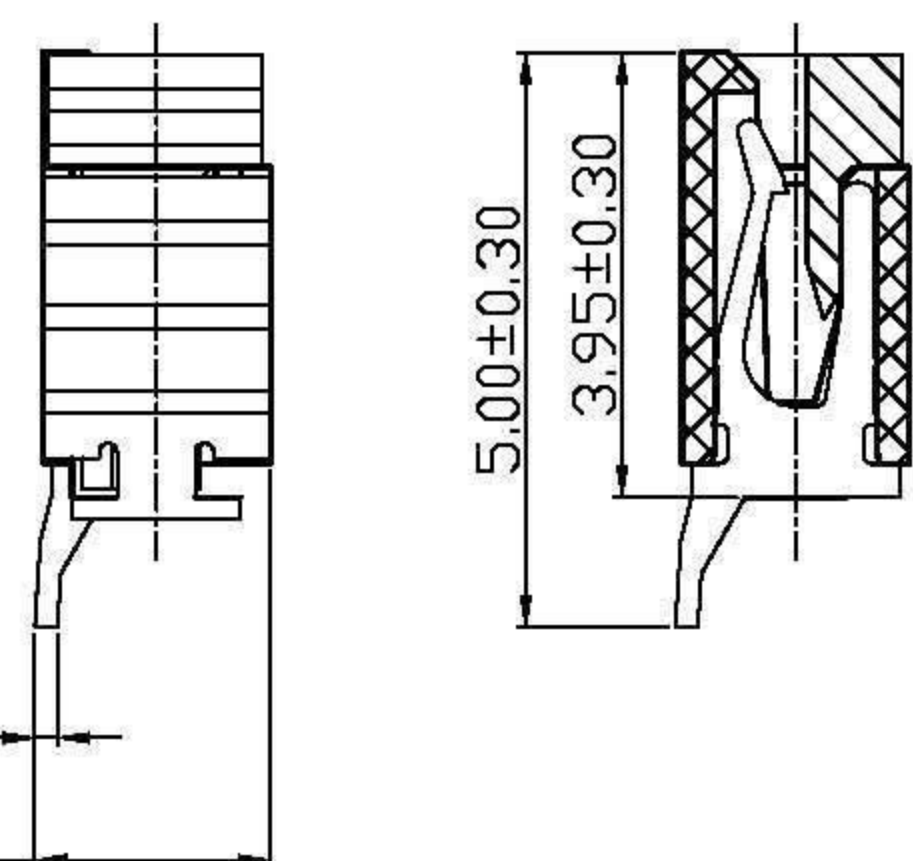
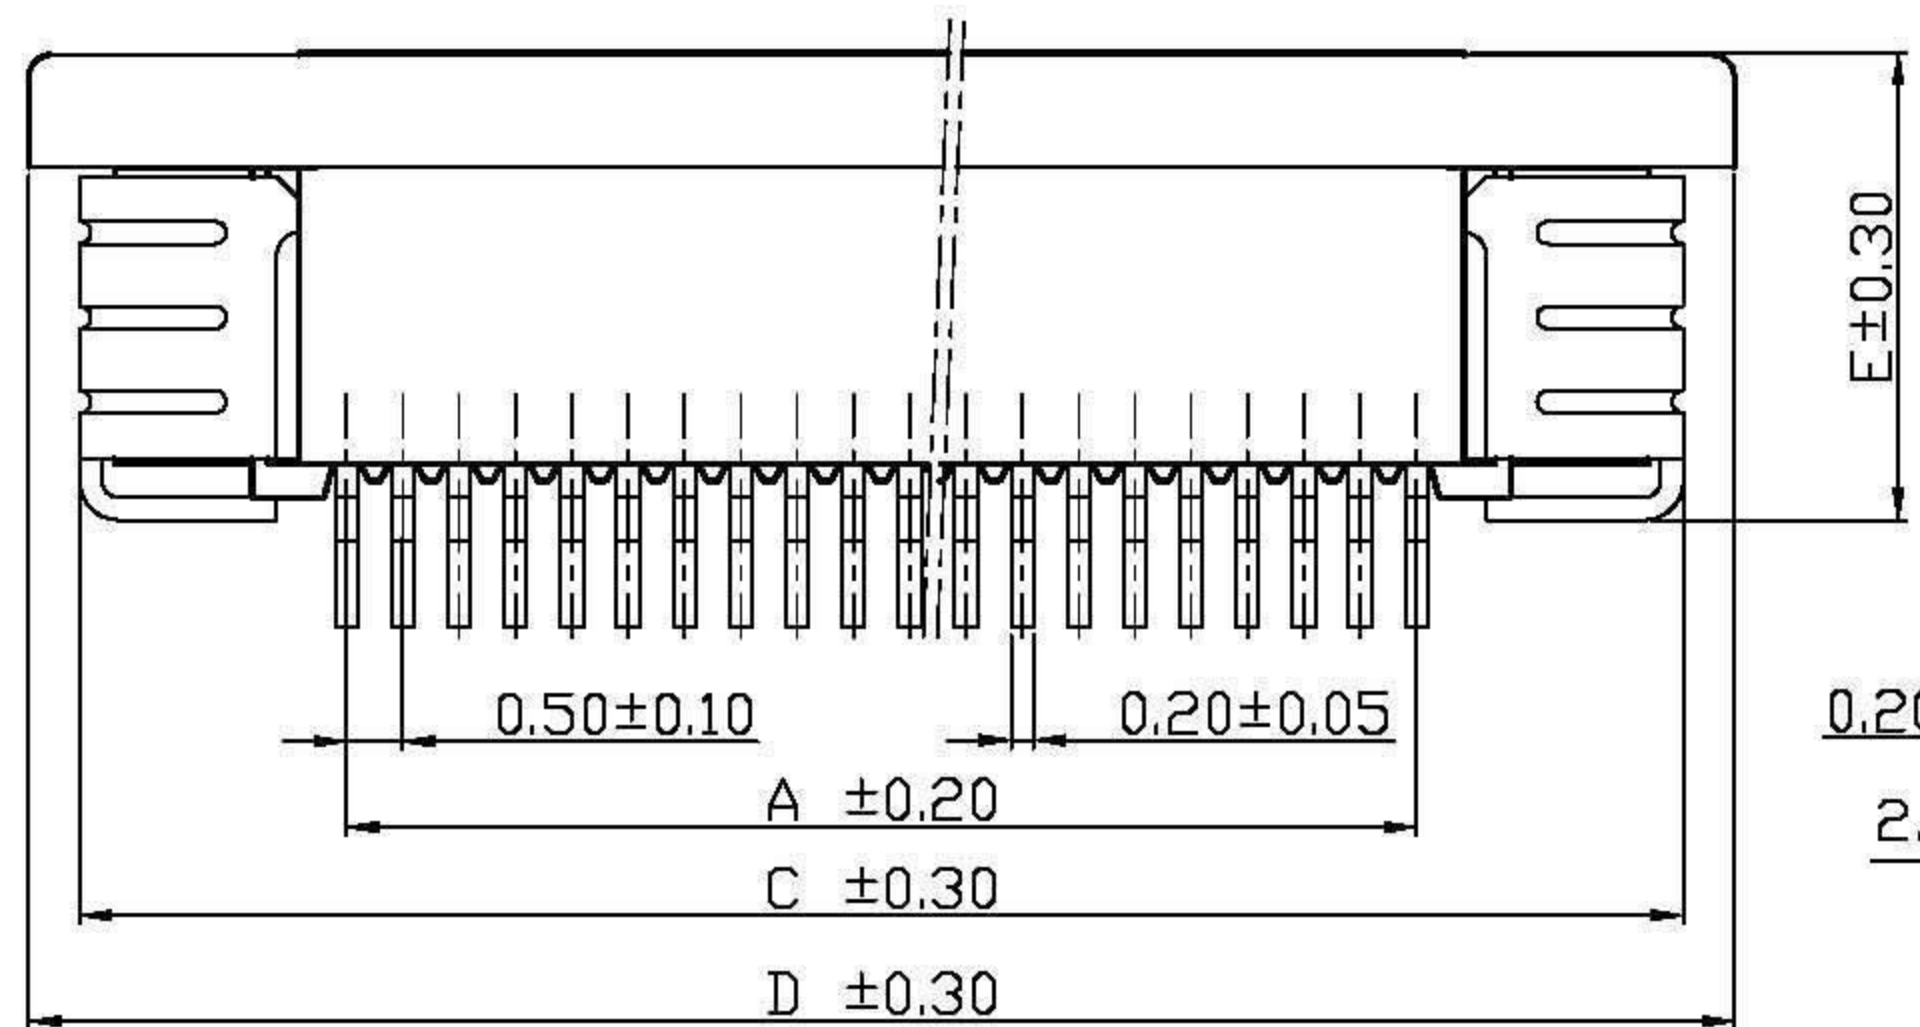


版次	日期	內容
1.0	05.07.15	原始版本

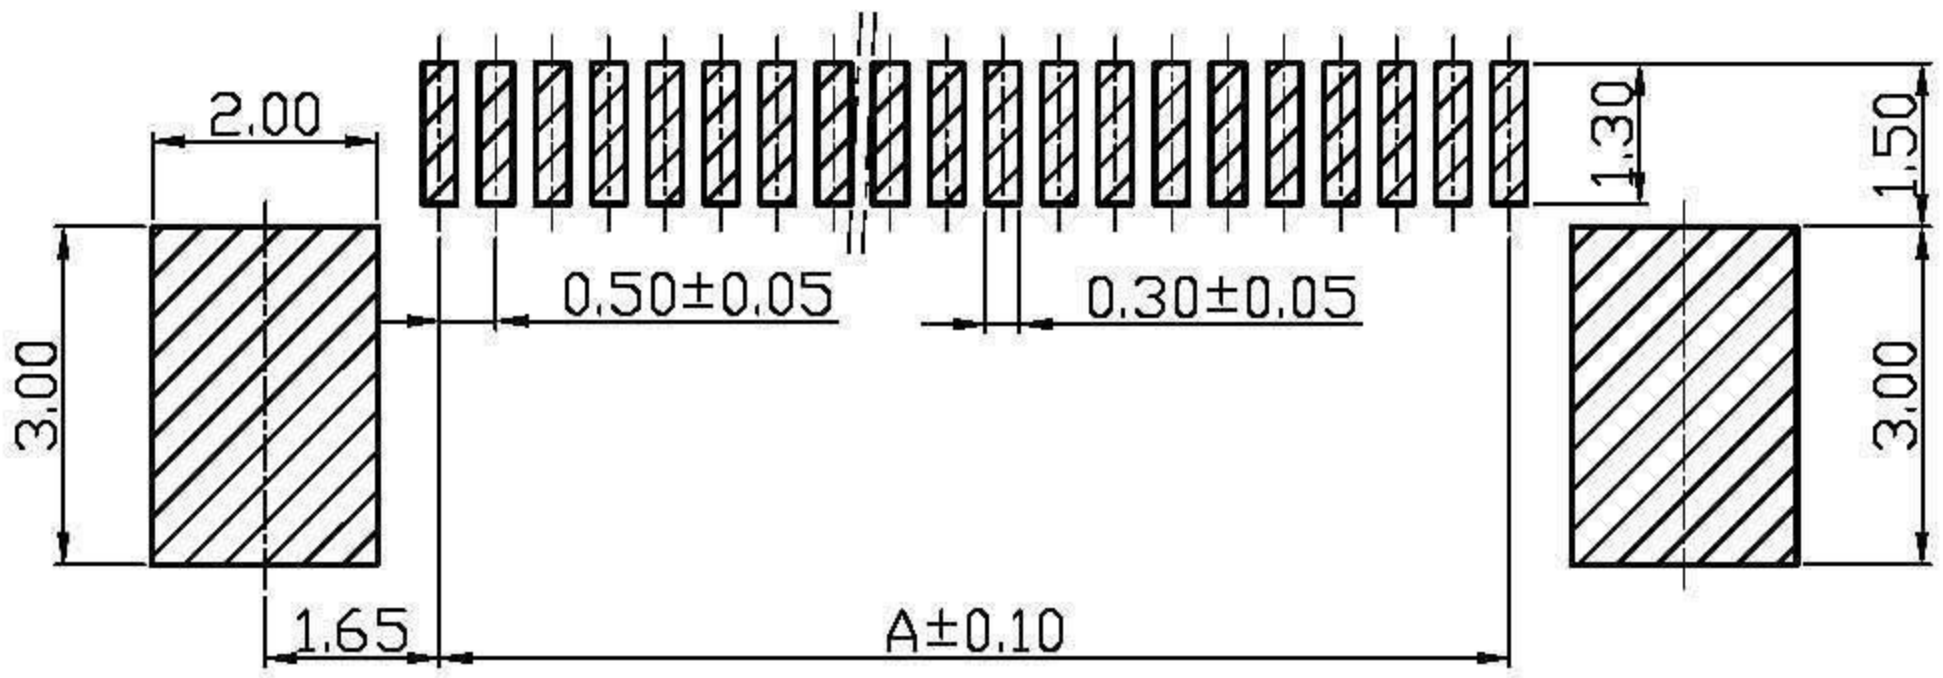

孔位	A	B	C	D	E
4	1.50	2.60	6.50	7.60	
5	2.00	3.10	7.00	8.10	
6	2.50	3.60	7.50	8.60	
7	3.00	4.10	8.00	9.10	
8	3.50	4.60	8.50	9.60	
9	4.00	5.10	9.00	10.10	
10	4.50	5.60	9.50	10.60	
11	5.00	6.10	10.00	11.10	
12	5.50	6.60	10.50	11.60	
13	6.00	7.10	11.00	12.10	
14	6.50	7.60	11.50	12.60	
15	7.00	8.10	12.00	13.10	
16	7.50	8.60	12.50	13.60	
17	8.00	9.10	13.00	14.10	
18	8.50	9.60	13.50	14.60	
19	9.00	10.10	14.00	15.10	
20	9.50	10.60	14.50	15.60	
21	10.00	11.10	15.00	16.10	
22	10.50	11.60	15.50	16.60	
23	11.00	12.10	16.00	17.10	
24	11.50	12.60	16.50	17.60	
25	12.00	13.10	17.00	18.10	
26	12.50	13.60	17.50	18.60	
27	13.00	14.10	18.00	19.10	
28	13.50	14.60	18.50	19.60	
29	14.00	15.10	19.00	20.10	
30	14.50	15.60	19.50	20.60	
31	15.00	16.10	20.00	21.10	
32	15.50	16.60	20.50	21.60	
33	16.00	17.10	21.00	22.10	
34	16.50	17.60	21.50	22.60	
35	17.00	18.10	22.00	23.10	
36	17.50	18.60	22.50	23.60	
37	18.00	19.10	23.00	24.10	
38	18.50	19.60	23.50	24.60	
39	19.00	20.10	24.00	25.10	
40	19.50	20.60	24.50	25.60	
41	20.00	21.10	25.00	26.10	
42	20.50	21.60	25.50	26.60	
43	21.00	22.10	26.00	27.10	
44	21.50	22.60	26.50	27.60	
45	22.00	23.10	27.00	28.10	
46	22.50	23.60	27.50	28.60	
47	23.00	24.10	28.00	29.10	
48	23.50	24.60	28.50	29.60	
49	24.00	25.10	29.00	30.10	
50	24.50	25.60	29.50	30.60	
51	25.00	26.10	30.00	31.10	
52	25.50	26.60	30.50	31.60	
53	26.00	27.10	31.00	32.10	
54	26.50	27.60	31.50	32.60	
55	27.00	28.10	32.00	33.10	
56	27.50	28.60	32.50	33.60	
57	28.00	29.10	33.00	34.10	
58	28.50	29.60	33.50	34.60	
59	29.00	30.10	34.00	35.10	
60	29.50	30.60	34.50	35.60	

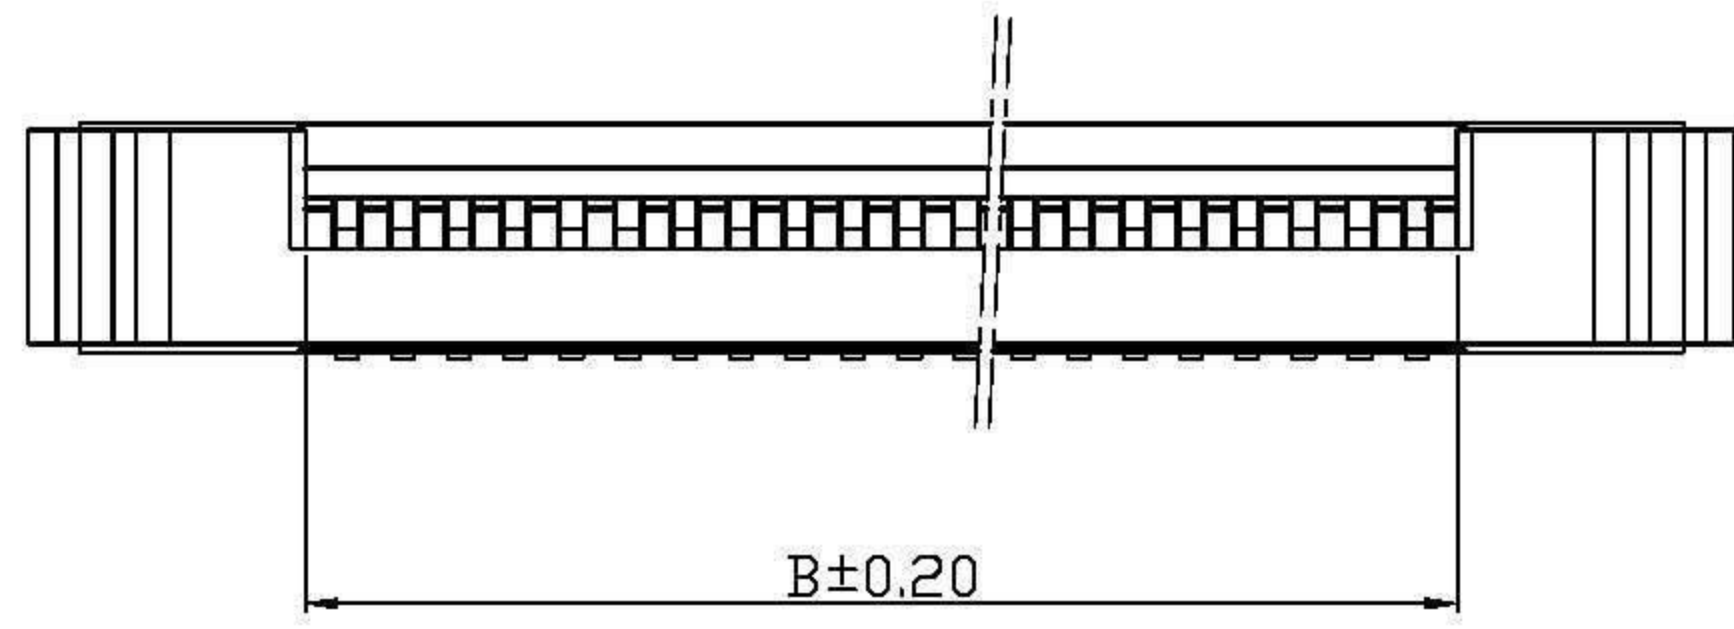

PCB Layout

性能:

- 額定電流: 0.5A
- 額定電壓: 50V
- 耐電壓: 200V
- 接觸電阻: 30mΩ
- 絕緣電阻: 500MΩ
- 工作溫度: -20°C~+85°C
- 蓋子(材質): PPS, UL94V-0
- 本體(材質): PA46, UL94V-0
- 端子(材質): 磷青銅, 鍍錫
- 固定片(材質): 磷青銅, 鍍錫

PEC管理規定:

- 禁止使用含有SS-00259所限制的物質。
- 對應的SGS或ITS出具的ICP-AES數據、不可測定物質的成分表,在一年有效期內。

立原科技有限公司					FPC/FFC Connector Pitch 0.5mm 下接觸			
尺寸公差	角度公差	製圖	審核	批准	料號	FPC050-02XX		
.X ±0.5	.X° ±0.5°	馮國慶			圖號			
.XX ±0.30	.XX° ±0.3°				比例	FIT	發行	工程
.XXX ±0.10	.XXX° ±0.1°	07.04.26			單位	mm	頁次	1/1
廠外承認書圖面								