





版次	日期	內容
1.0	05.07.15	原始版本

孔數	A	B	C	D
4	11.00	3.00	5.10	10.40
5	12.00	4.00	6.10	11.40
6	13.00	5.00	7.10	12.40
7	14.00	6.00	8.10	13.40
8	15.00	7.00	9.10	14.40
9	16.00	8.00	10.10	15.40
10	17.00	9.00	11.10	16.40
11	18.00	10.00	12.10	17.40
12	19.00	11.00	13.10	18.40
13	20.00	12.00	14.10	19.40
14	21.00	13.00	15.10	20.40
15	22.00	14.00	16.10	21.40
16	23.00	15.00	17.10	22.40
17	24.00	16.00	18.10	23.40
18	25.00	17.00	19.10	24.40
19	26.00	18.00	20.10	25.40
20	27.00	19.00	21.10	26.40
21	28.00	20.00	22.10	27.40
22	29.00	21.00	23.10	28.40
23	30.00	22.00	24.10	29.40
24	31.00	23.00	25.10	30.40
25	32.00	24.00	26.10	31.40
26	33.00	25.00	27.10	32.40
27	34.00	26.00	28.10	33.40
28	35.00	27.00	29.10	34.40
29	36.00	28.00	30.10	35.40
30	37.00	29.00	31.10	36.40
31	38.00	30.00	32.10	37.40
32	39.00	31.00	33.10	38.40
33	40.00	32.00	34.10	39.40
34	41.00	33.00	35.10	40.40
35	42.00	34.00	36.10	41.40

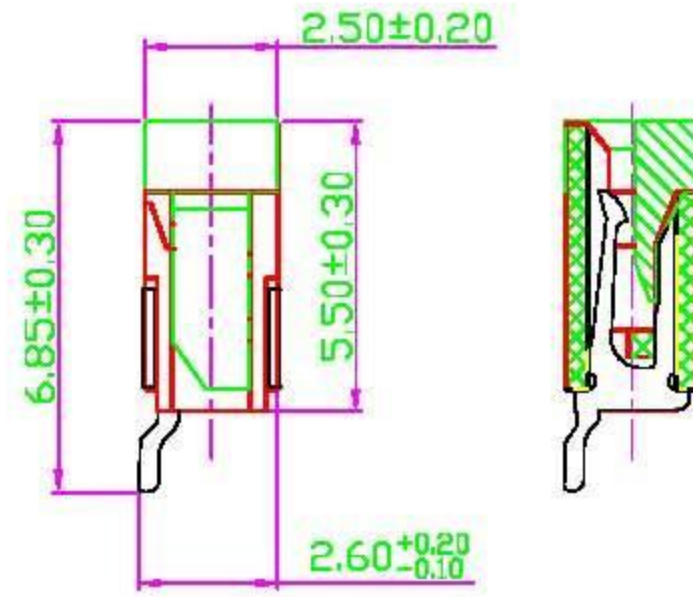

性能:  
 額定電流:0.5A  
 額定電壓:50V  
 耐電壓:500V  
 接觸電阻:30mΩ  
 絕緣電阻:500MΩ  
 工作溫度:-20~+80°C  
 本體(材質):PPS, UL94V-0  
 蓋子(材質):PA46, UL94V-0  
 插簧(材質):磷青銅, 鍍霧錫  
 焊片(材質):黃銅, 鍍霧錫

PEC管理規定:  
 1. 禁止使用含有 SS-00259所限制的物質。  
 2. 對應的SGS或ITS出具的ICP-AES數據、不可測定物質的成分表, 在一年有效期內。

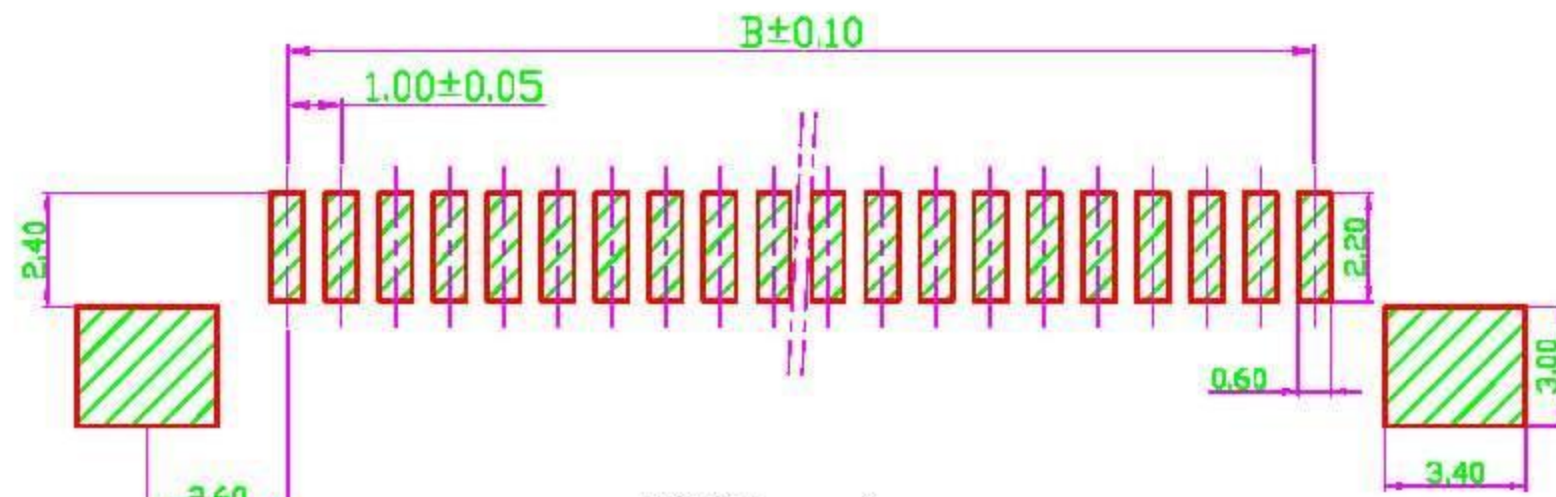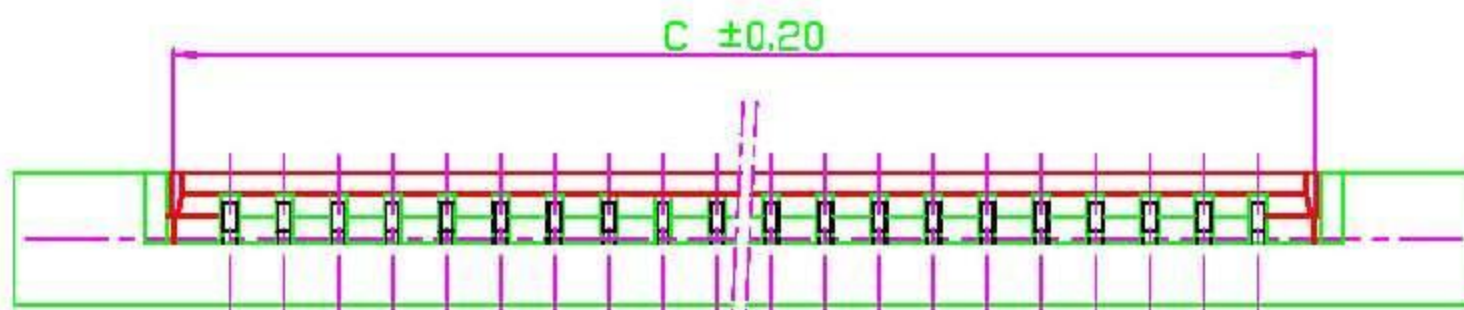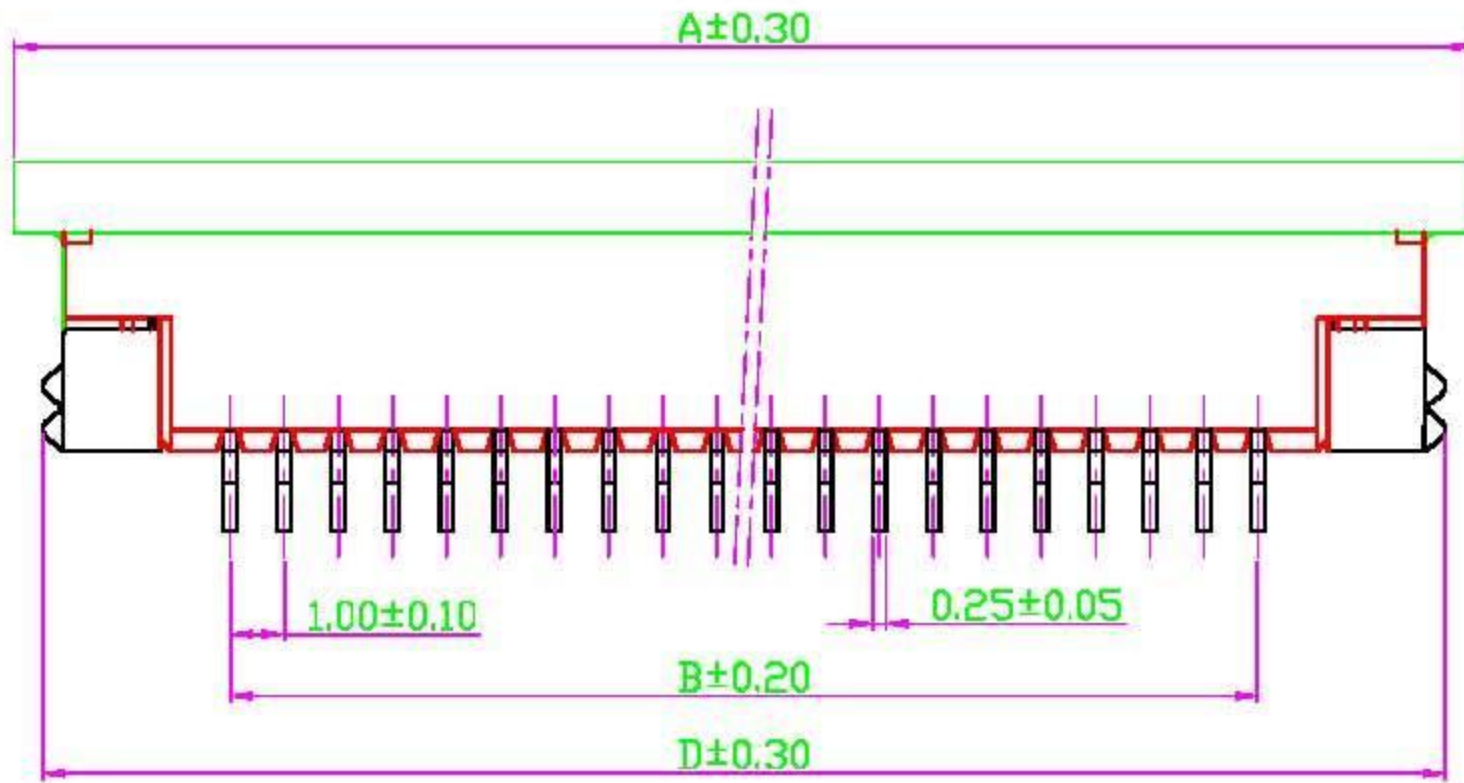

PCB Layout

立原科技有限公司 Easy Show Technology Corp.				FPC10-XXX-XXXX			
尺寸公差	角度公差	製圖	審核	批准	料號		
.X ±0.5	.X° ±0.5°				圖號		
.XX ±0.30	.XX° ±0.3°				比例	FIT	發行 工程
.XXX ±0.10	.XXX° ±0.1°				單位	mm	頁次 1/1
廠外承認書圖面							