





RoHS

MATERIAL

Insulator : High Temperature Polyester
Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Operation Temperature : -40°C to + 105°C

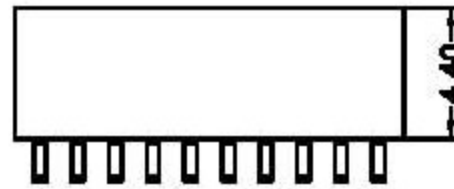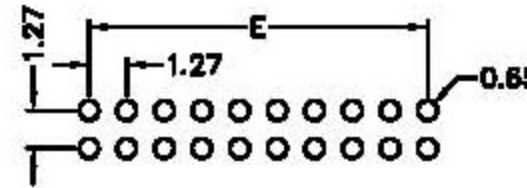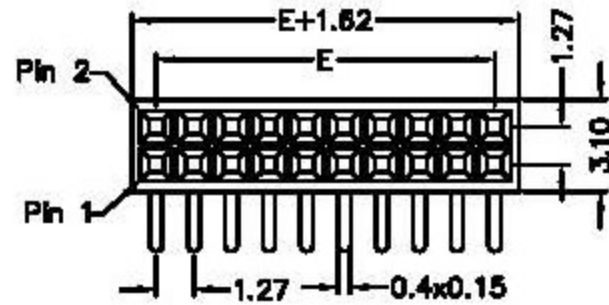

Number Of Contacts

Unit: mm

Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E
		8	8.89	15	17.78	22	26.67	29	35.58	36	44.45	43	53.34	50	62.23
		9	10.16	16	19.05	23	27.94	30	36.83	37	45.72	44	54.61		
3	2.54	10	11.43	17	20.32	24	29.21	31	38.10	38	46.99	45	55.88		
4	3.81	11	12.70	18	21.59	25	30.48	32	39.37	39	48.26	46	57.15		
5	5.08	12	13.97	19	22.86	26	31.75	33	40.64	40	49.53	47	58.42		
6	6.35	13	15.24	20	24.13	27	33.02	34	41.91	41	50.80	48	59.69		
7	7.62	14	16.51	21	25.40	28	34.29	35	43.18	42	52.07	49	60.96		

立原科技有限公司
Easy Show Technology Corp.

Title: Female Header Pitch 1.27mm
雙排, 90度, DIP Type

Tolerances		App.	Dabbie	Units	Part no:
Linear	Angles	Chk.	Kitty	<input checked="" type="checkbox"/> mm	
.X ±0.30	X' ±5°	Dr.	Eddy	<input type="checkbox"/> Size	Dwg no:
.XX ±0.20	X' ±2°	Date.	2007.09.12	A4	
.XXX ±0.10	.XX' ±1°			Scale	Sheet
Projection				1:1	1/1