

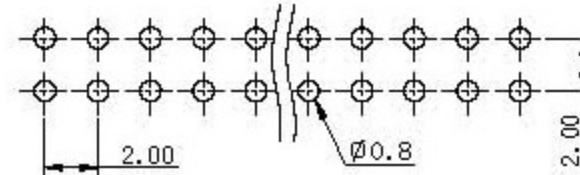
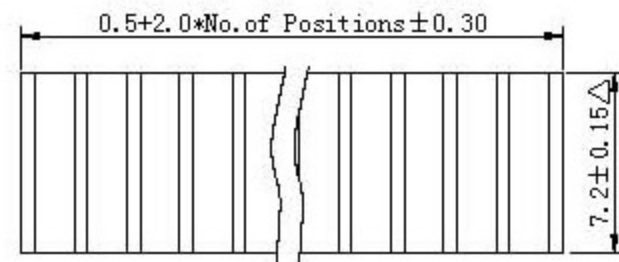


RoHS

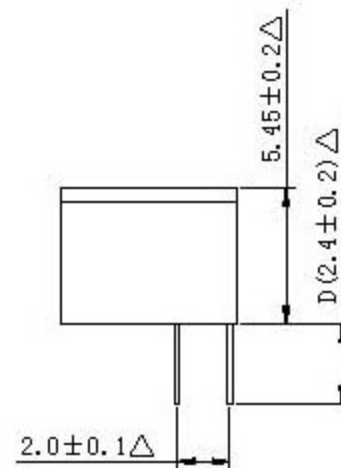

P.C.B. Hole Layout

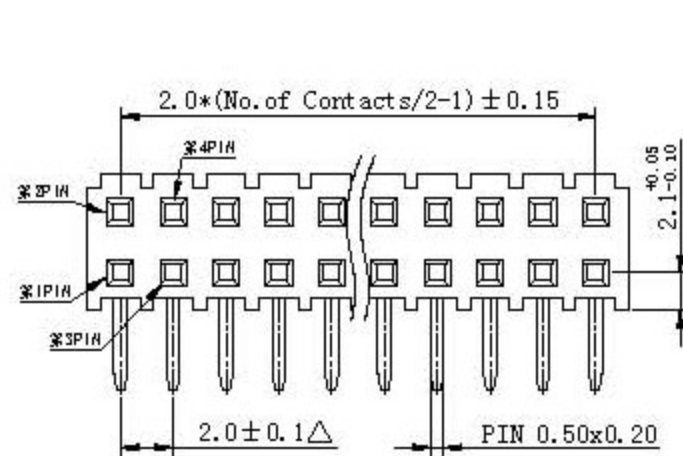

△此符号表示重點管控尺寸

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester,UL 94V-0

Standard :Nylon-6T

Finish: Tin,Gold or Duplex Plated

Standard: Gold Flash all over

Note:

Duplex plating: Gold Plated on contact area,
Tin on solder area

立原科技有限公司
Easy Show Technology Corp.

Title: Female Header Pitch 2.0mm
雙排, 90度, DIP Type

Tolerances		App.	Dabbie	Units	Part no:
Linear	Angles				
.X ±0.30	X' ± 5°	Chk.	Kitty	☒	Dwg no:
.XX ±0.20	X' ± 2°	Dr.	Eddy	☐	
.XXX ±0.10	.XX' ± 1°	Date.	2007.09.12	Size A4	Sheet 1/1
Projection				Scale 1:1	