
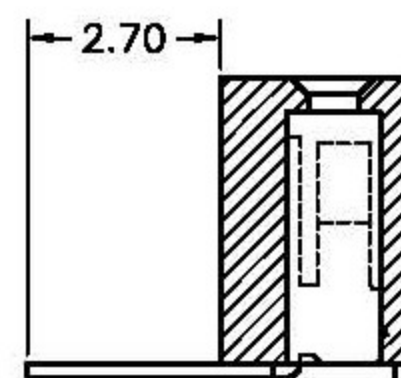
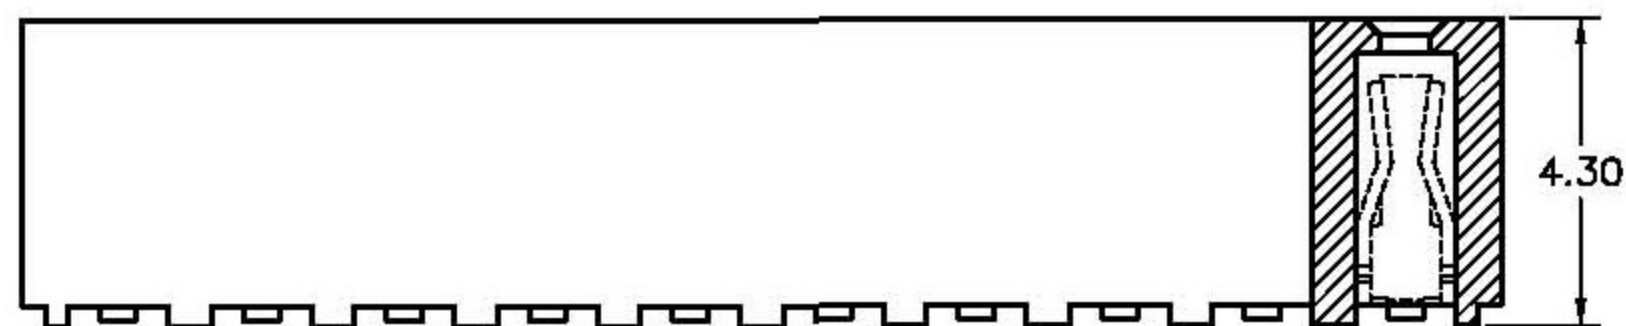


RoHS

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni

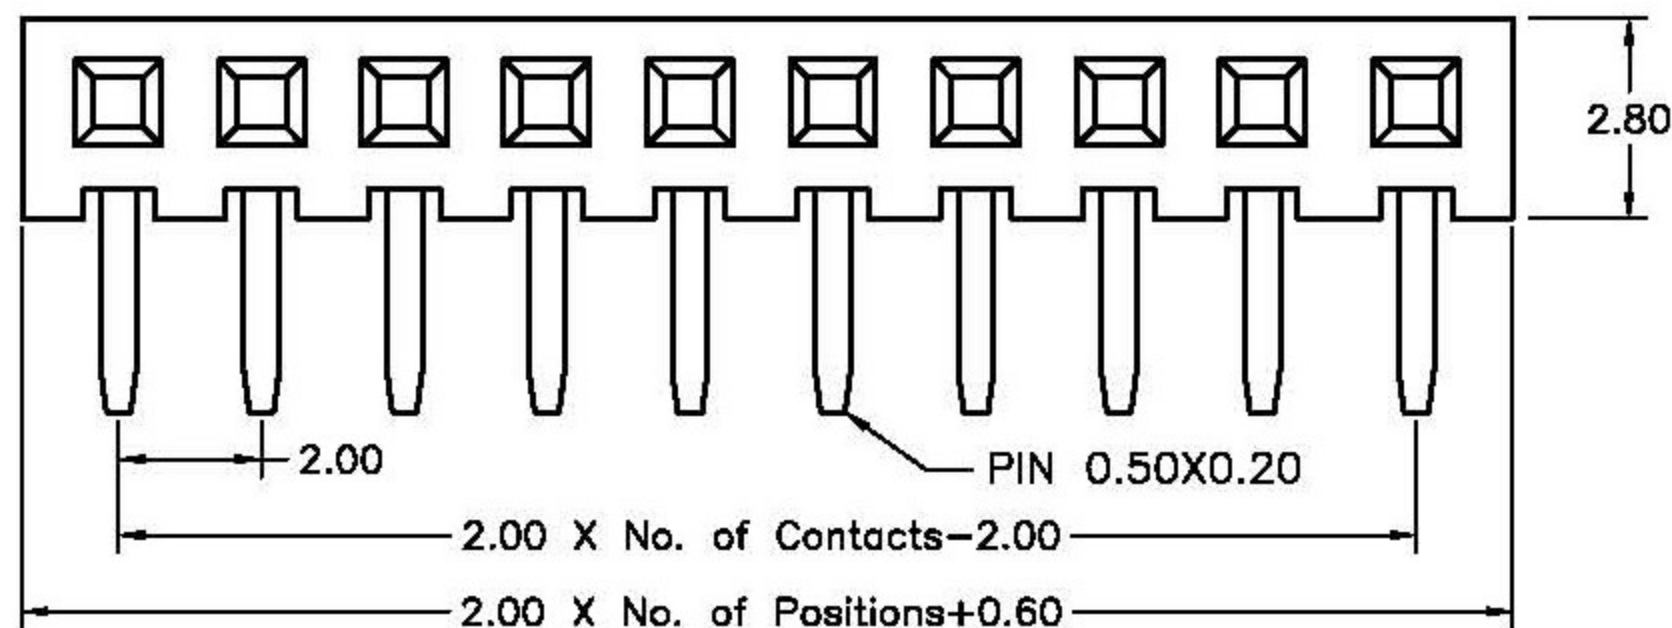

PCB LAYOUT

立原科技有限公司
 Easy Show Technology Corp.

Title: Female Header Pitch 2.0mm
 單排, 90度, DIP Type

Tolerances		App.	Dabbie	Units	Part no:
Linear	Angles	Chk.	Kitty	☒ mm	
.X ±0.30	X' ± 5°	Dr.	Eddy	Size A4	Dwg no:
.XX ±0.20	X' ± 2°	Date.	2007.09.12	Scale 1:1	Sheet 1/1
.XXX ±0.10	.XX' ± 1°				
Projection					