
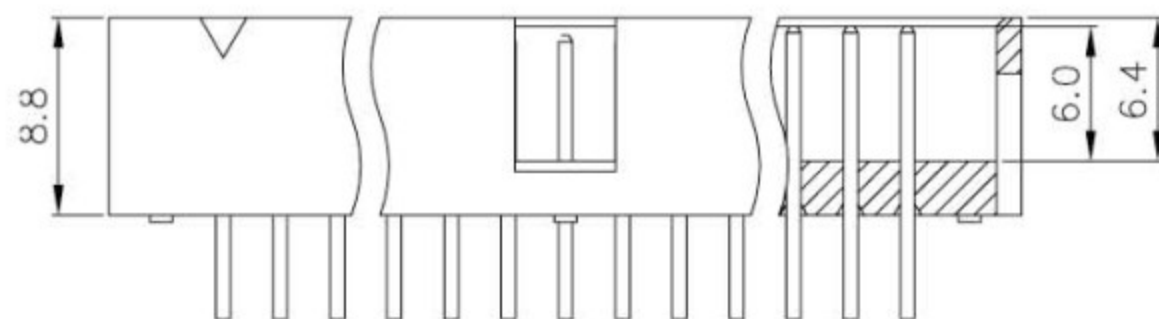
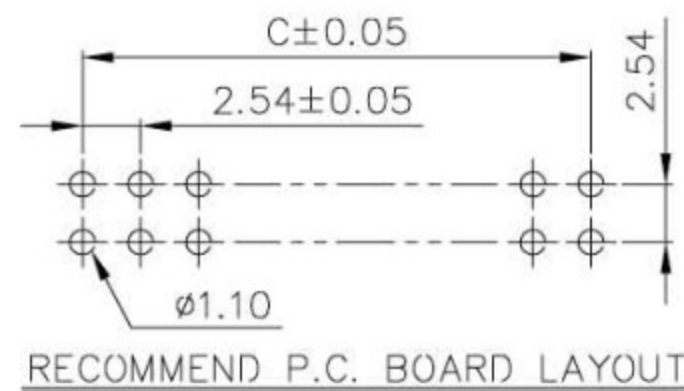
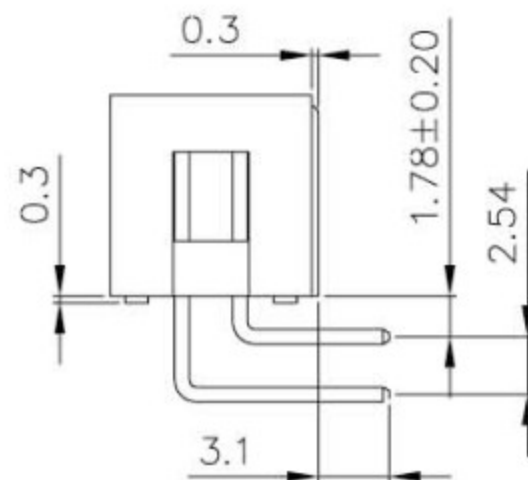


RoHS

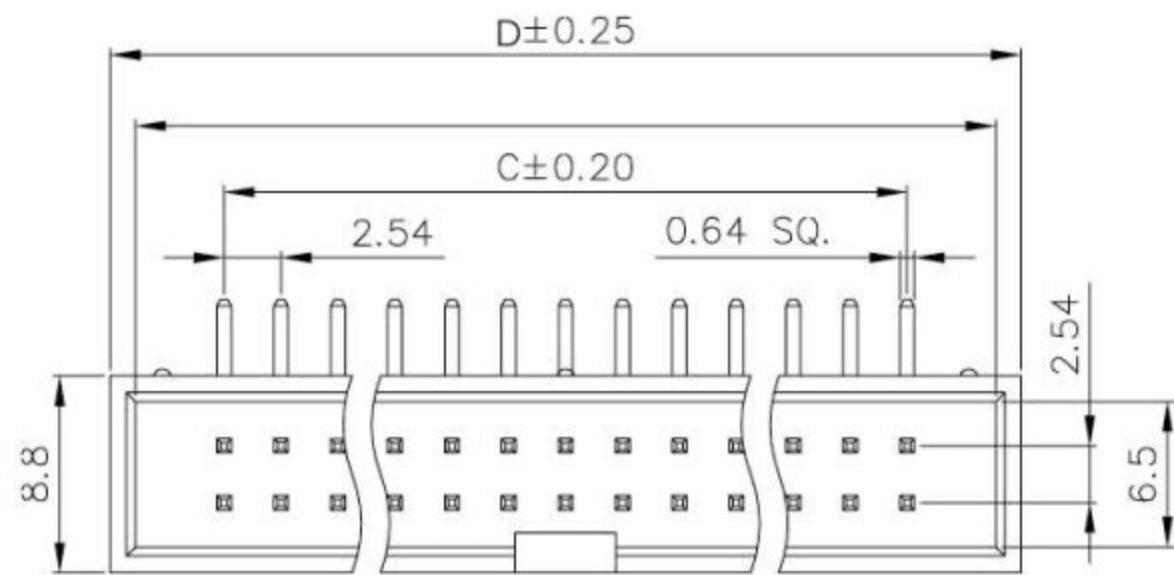

Material:
Insulator: PBT+30% Glass Fiber (UL94V-0).
Contact: Copper Alloy.
Contact Plated: Gold or Tin over Nickel Plated.

Specification:
Current Rating: 1 Amp.
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 1000MΩ Min. at DC 500V.
Contact Resistance: 15mΩ Max..
Operating Temperature: -40°C ~ +105°C.

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D
03	5.08	15.27	11	25.40	35.59
04	7.62	17.81	12	27.94	38.13
05	10.16	20.35	13	30.48	40.67
06	12.70	22.89	14	33.02	43.21
07	15.24	25.43	15	35.56	45.75
08	17.78	27.97	16	38.10	48.29
09	20.32	30.51	17	40.64	50.83
10	22.86	33.05	18	43.18	53.37

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D
19	45.72	55.91	27	66.04	76.23
20	48.26	58.45	28	68.58	78.77
21	50.80	53.34	29	71.12	81.31
22	53.34	55.88	30	73.66	83.85
23	55.88	58.42	31	76.20	86.39
24	58.42	60.96	32	78.74	88.93
25	60.96	63.50			
26	63.50	66.04			

立原科技有限公司
Easy Show Technology Corp.

Title: Box Header Pitch 2.54mm
90度, 雙排, DIP Type

Tolerances		App.	Dabbie	Units	Part no:
Linear	Angles				
.X ±0.30	X' ± 5°	Chk.	Kitty	☒ mm	Dwg no:
.XX ±0.20	X' ± 2°	Dr.	Eddy	Size A4	
.XXX ±0.10	.XX' ± 1°	Date.	2007.09.12	Scale 1:1	Sheet 1/1
Projection					