


RoHS

NOTES:

Rated Current: 5.0AMPS
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/Minute
 Insulation Resistance: 500MΩ min at 500V DC
 Operation Temperature: -50°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PBT(UL94V-0)
 Sheel: Steel, Ni Plated
 Screw: Steel, Ni Plated

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

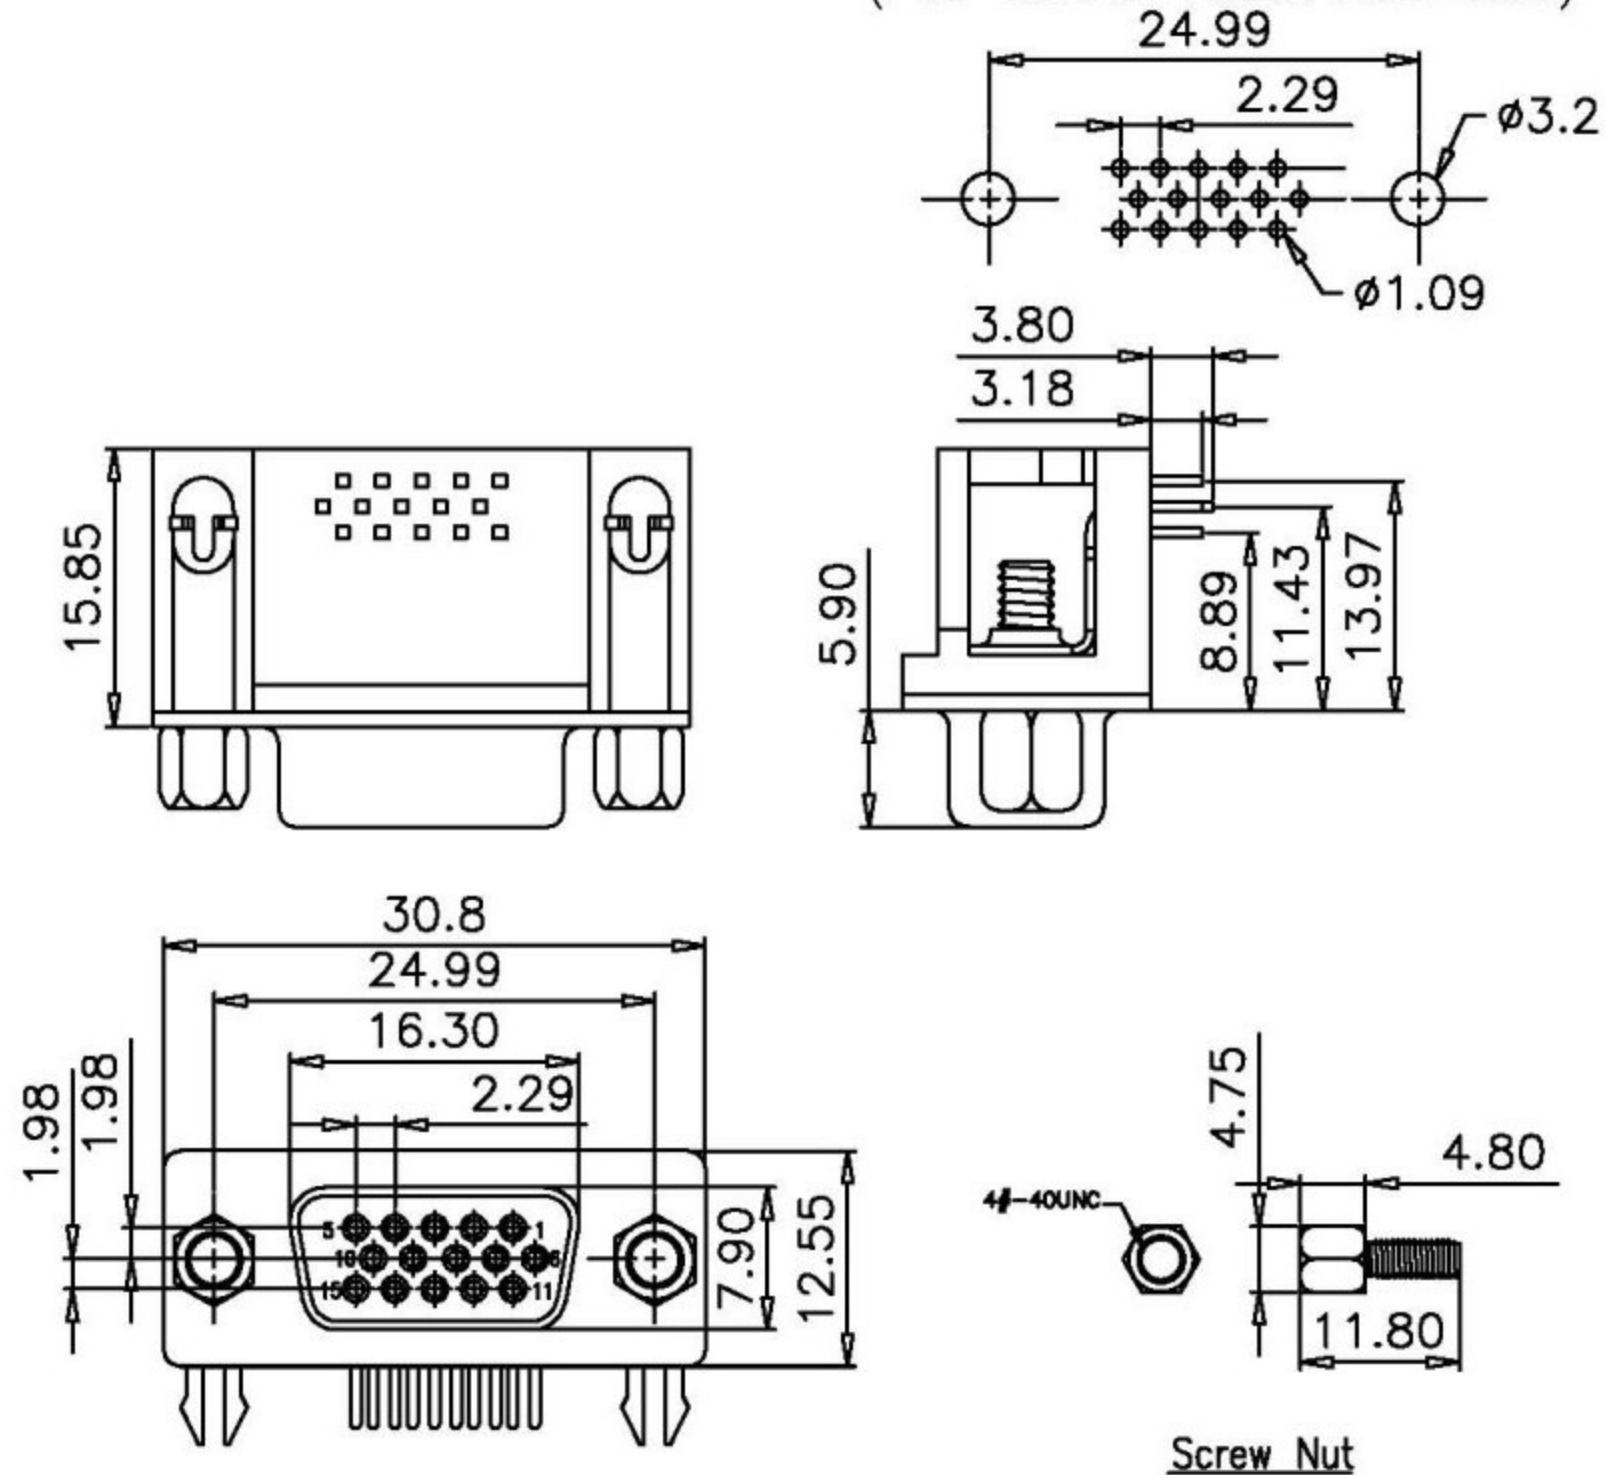

立原科技有限公司 Easy Show Technology Corp.		Title: D-Sub Female connector 8.89mm Footprint R/A Type	
Tolerances		App. Dabbie	Units
Linear	Angles	Chk. Kitty	<input checked="" type="checkbox"/> mm
.X ±0.30	X' ± 5°	Dr. Eddy	<input type="checkbox"/> inch
.XX ±0.20	X' ± 2°	Date. 2007.09.12	Size A4
.XXX ±0.10	.XX' ± 1°		Scale 1:1
Projection			Sheet 1/1