
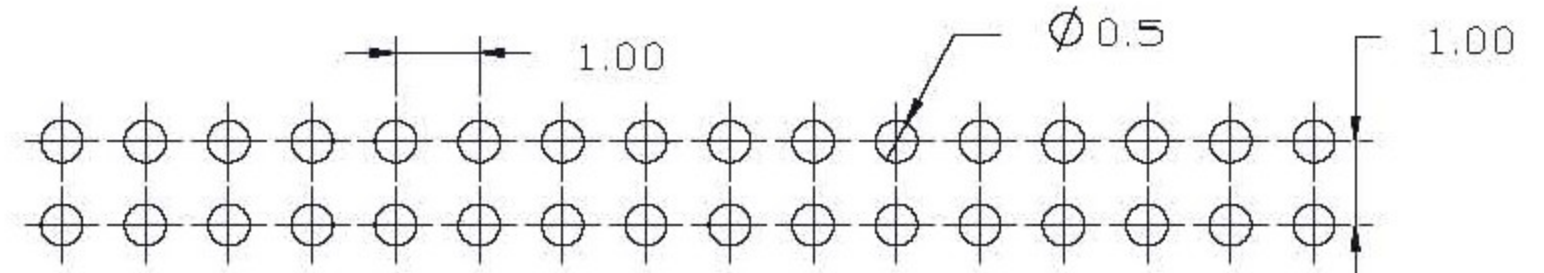
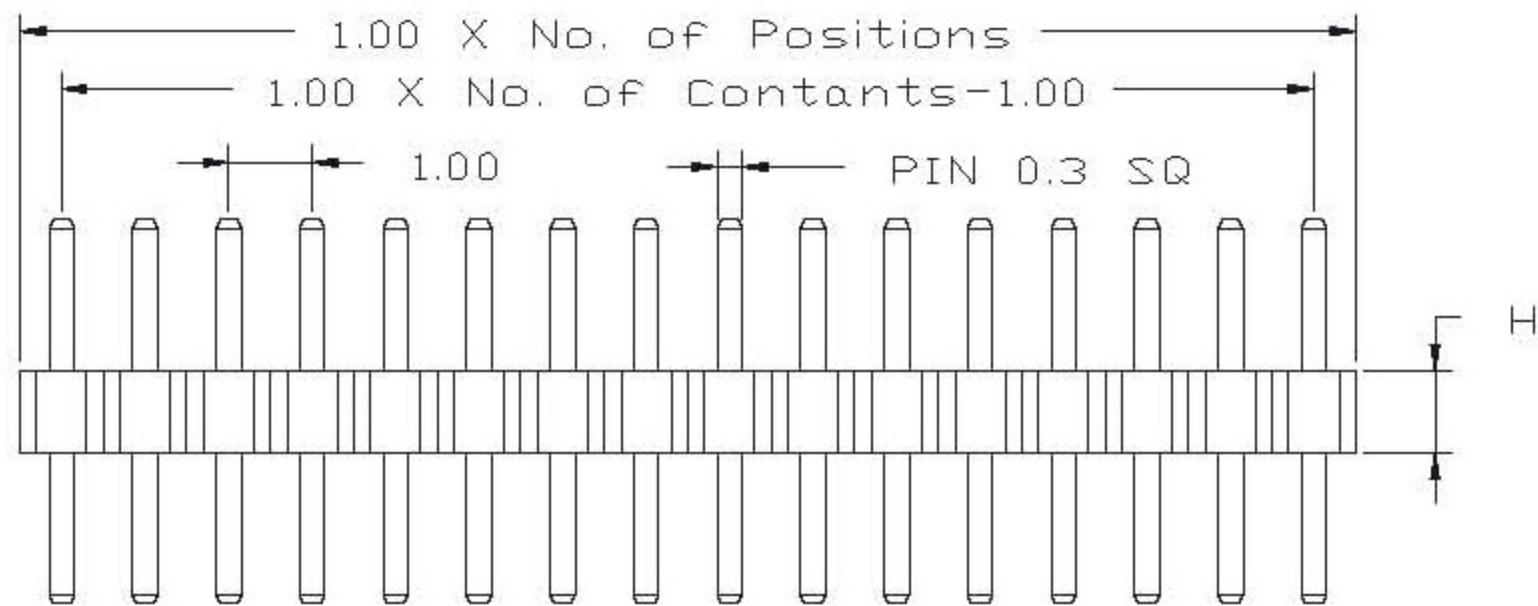
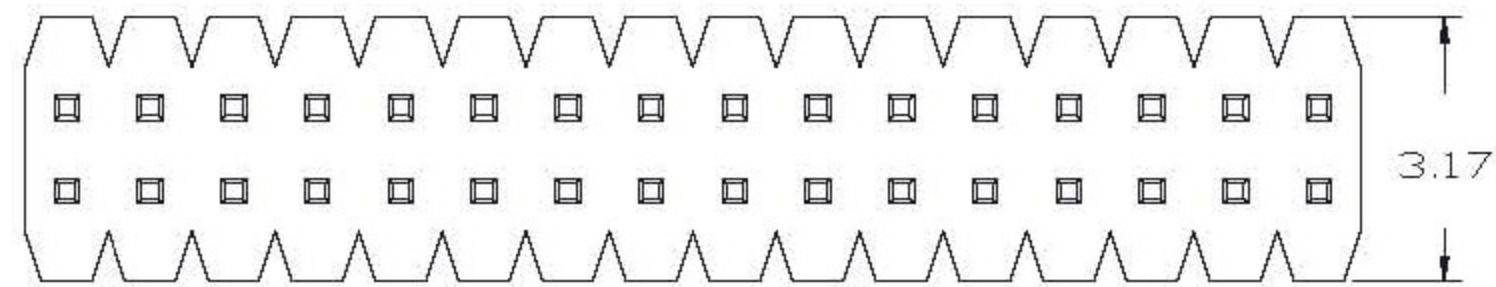


RoHS

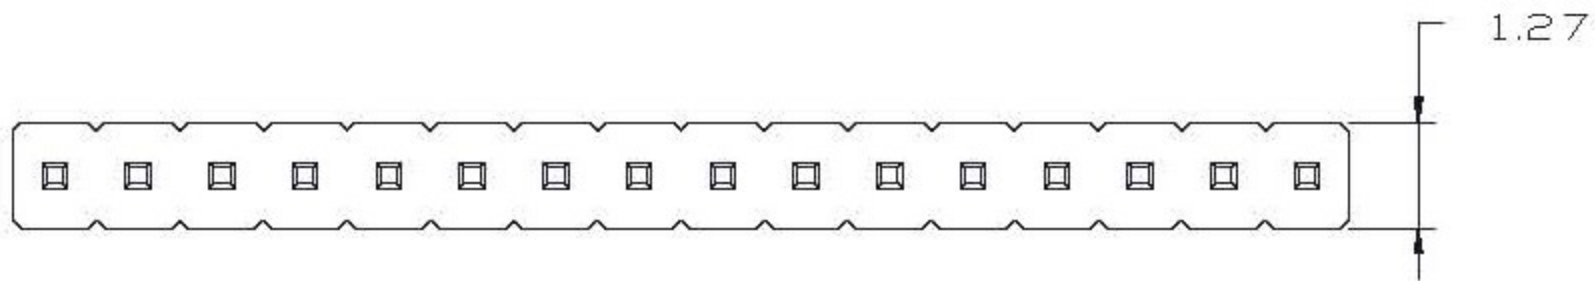

PCB LAYOUT

Material:
Contact Material: Phosphor Bronze
Contact plating: Au or Sn Over 50μ " Ni
Insulator Material: High Temperature
Black Polyester UL94V-0

Electrical:
Current rating: 0.75Amp
 Ω /contact
Insulation resistance: $\geq 1000M\Omega$ at V=100V
Withstanding Voltage: 500V AC/minute

Mechanical:
Lead Size Accepted: 0.30mmSQ
Operating temperatures: Gold Plated: $-55^{\circ}C$ to $+105^{\circ}C$
Tin plated: $-40^{\circ}C$ to $+105^{\circ}C$

立原科技有限公司
Easy Show Technology Corp.

Title: Pin Header Pitch 1.0mm
180度, DIP Type

Tolerances		App.	Dabbie	Units <input checked="" type="checkbox"/> mm <input type="checkbox"/> inch	Part no:
Linear	Angles				
.X ± 0.30	X' $\pm 5^{\circ}$	Dr.	Eddy	Size A4	Dwg no:
.XX ± 0.20	X' $\pm 2^{\circ}$	Date.	2007.09.12	Scale 1:1	Sheet 1/1
.XXX ± 0.10	.XX' $\pm 1^{\circ}$				
Projection 					