
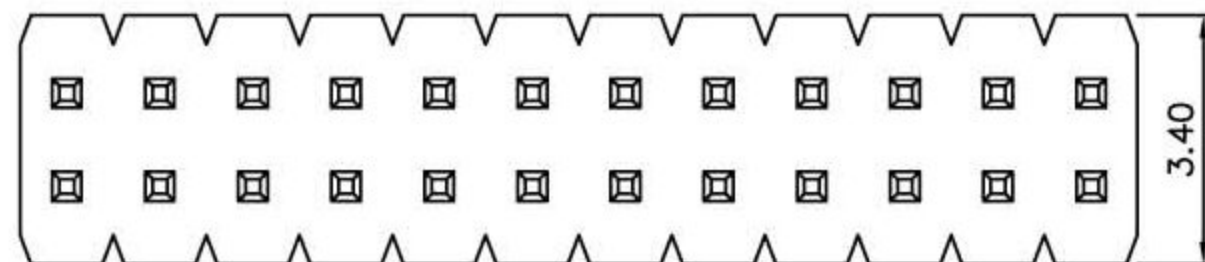
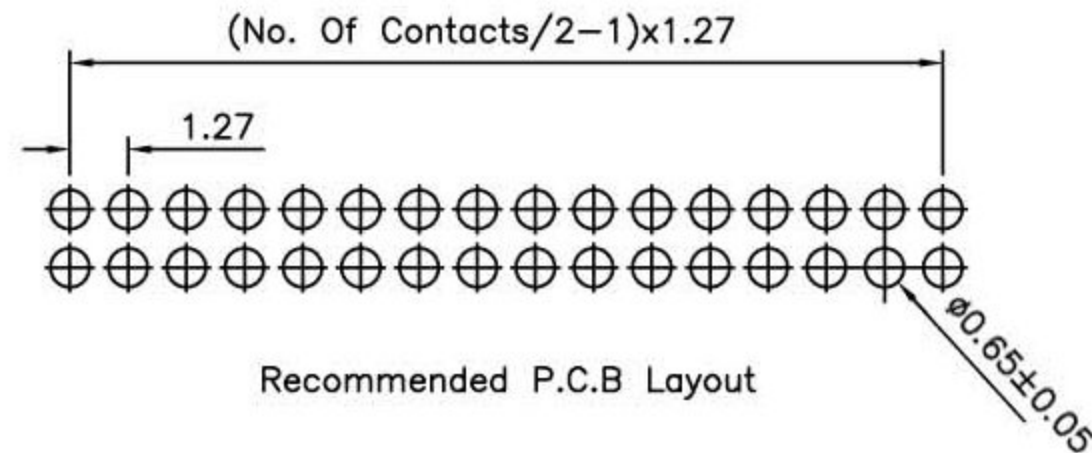
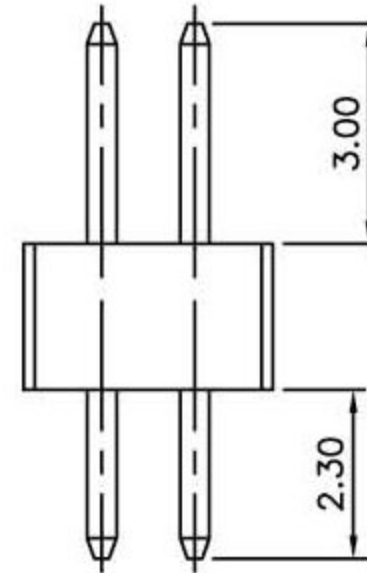


RoHS

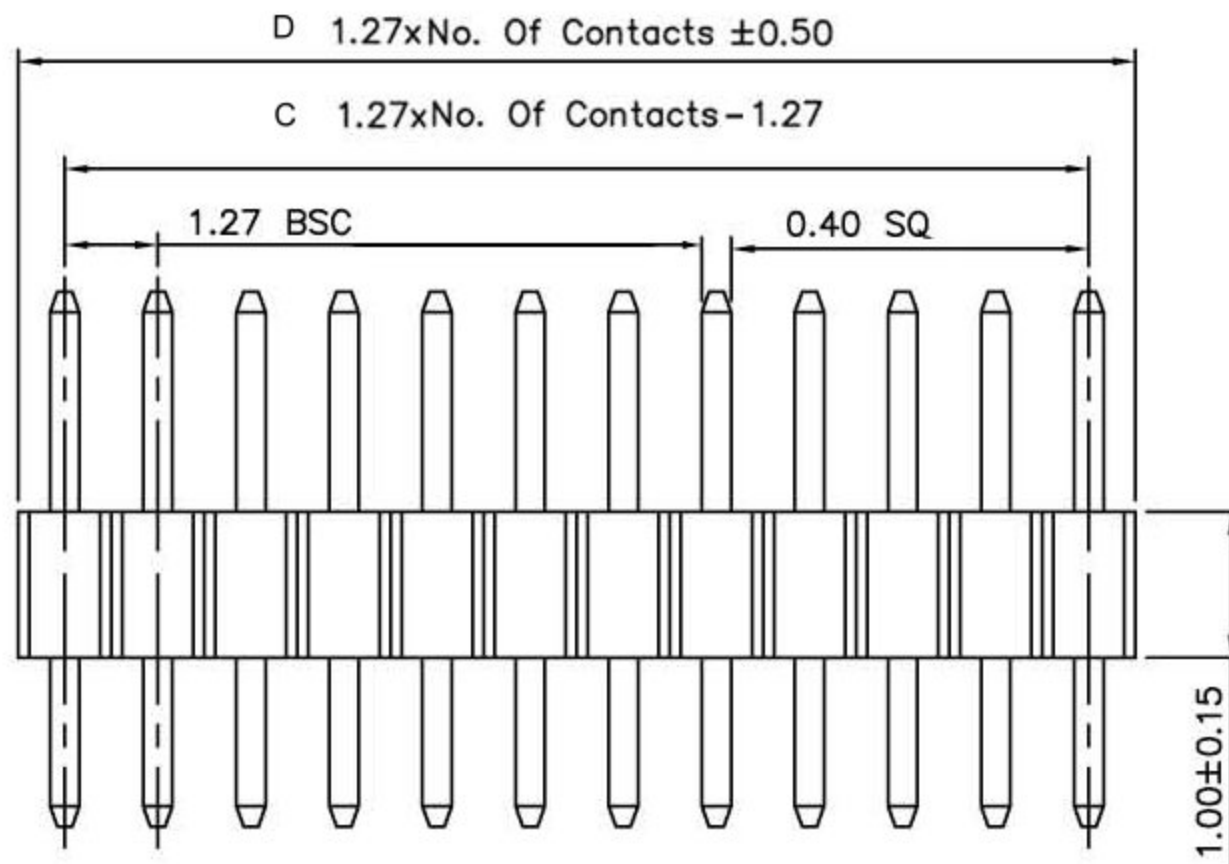

MATERIAL

Insulator : 30% Glass fiber PBT
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D
02	1.27	2.54	12	13.97	15.24
03	2.54	3.81	13	15.24	16.51
04	3.81	5.08	14	16.51	17.78
05	5.08	6.35	15	17.78	19.05
06	6.35	7.62	16	19.05	20.32
07	7.62	8.89	17	20.32	21.59
08	8.89	10.16	18	21.59	22.86
09	10.16	11.43	19	22.86	24.13
10	11.43	12.70	20	24.13	25.40
11	12.70	13.97	21	25.40	26.67

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D
22	26.67	27.94	32	39.37	40.64
23	27.94	29.21	33	40.64	41.91
24	29.21	30.48	34	41.91	43.18
25	30.48	31.75	35	43.18	44.45
26	31.75	33.02	36	44.45	45.72
27	33.02	34.29	37	45.72	46.99
28	34.29	35.56	38	46.99	48.26
29	35.56	36.83	39	48.26	49.53
30	36.83	38.10	40	49.53	50.80
31	38.10	39.37			

立原科技有限公司
Easy Show Technology Corp.

Title: 1.27X1.27 Pin Header Straight Daul Row

Tolerances		App.	Dabbie	Units	Part no:
Linear	Angles				
.X ±0.30	X' ± 5°	Chk.	Kitty	☒ Size A4	Dwg no:
.XX ±0.20	X' ± 2°	Dr.	Eddy	Scale 1:1	
.XXX ±0.10	.XX' ± 1°	Date.	2007.09.12	Sheet 1/1	
Projection					