


RoHS

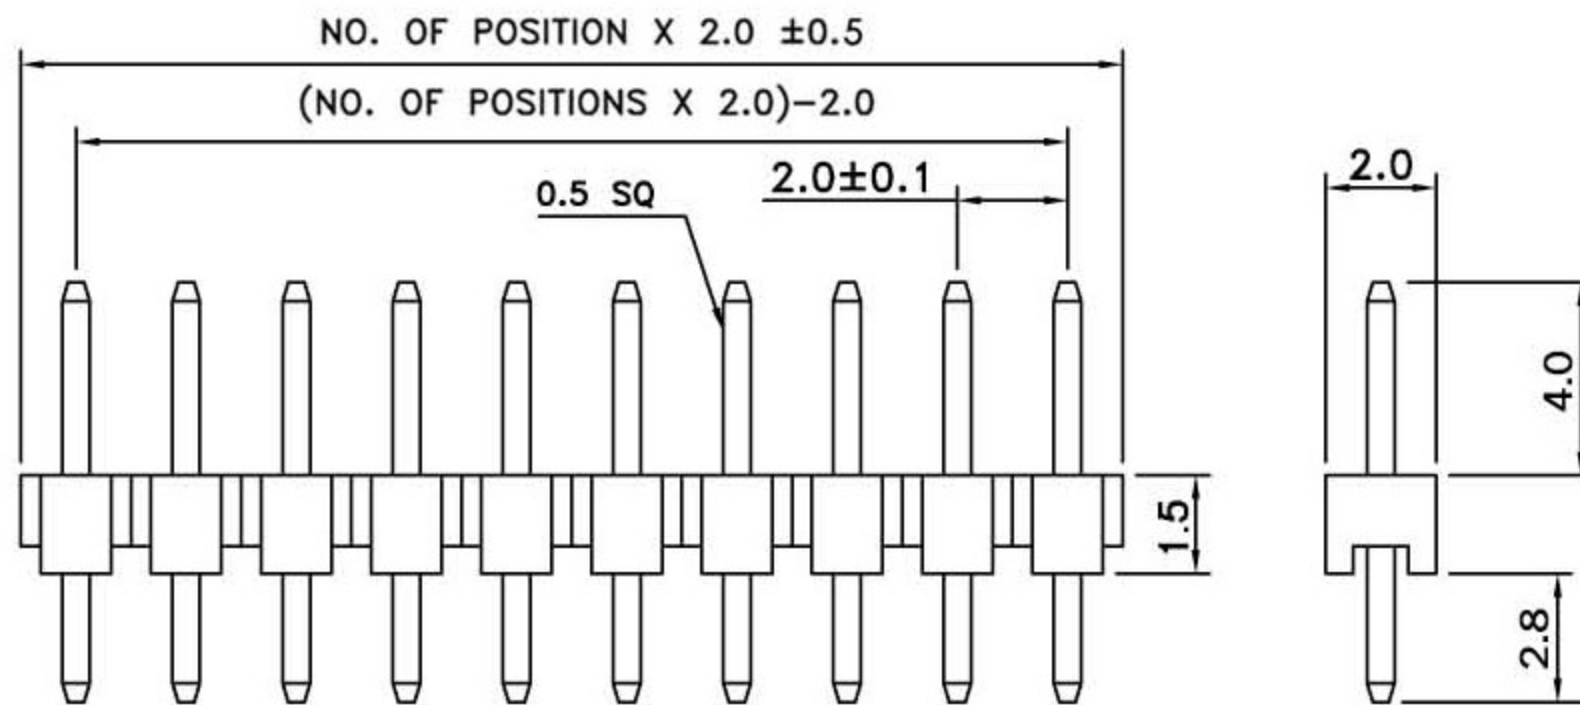

MATERIAL


Insulator : 30% Glass fiber PBT
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D
02	2.00	4.00	12	22.00	24.00
03	4.00	6.00	13	24.00	26.00
04	6.00	8.00	14	26.00	28.00
05	8.00	10.00	15	28.00	30.00
06	10.00	12.00	16	30.00	32.00
07	12.00	14.00	17	32.00	34.00
08	14.00	16.00	18	34.00	36.00
09	16.00	18.00	19	36.00	38.00
10	18.00	20.00	20	38.00	40.00
11	20.00	22.00	21	40.00	42.00

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D
22	42.00	44.00	32	62.00	64.00
23	44.00	46.00	33	64.00	66.00
24	46.00	48.00	34	66.00	68.00
25	48.00	50.00	35	68.00	70.00
26	50.00	52.00	36	70.00	72.00
27	52.00	54.00	37	72.00	74.00
28	54.00	56.00	38	74.00	76.00
29	56.00	58.00	39	76.00	78.00
30	58.00	60.00	40	78.00	80.00
31	60.00	62.00			

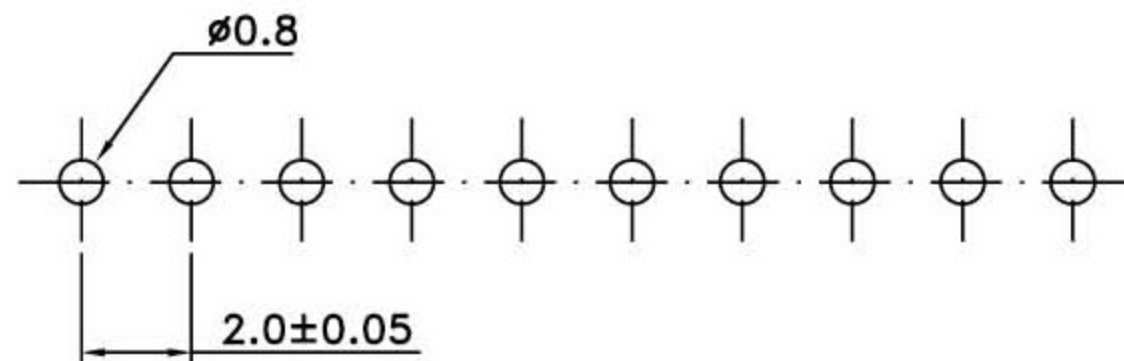

P.C.B. LAYOUT

立原科技有限公司
Easy Show Technology Corp.

Title: 2.0 Pin Header Signal Row
Straight Type

Tolerances		App.	Dabbie	Units ☒ ☐	Part no:
Linear	Angles				
.X ±0.30	X' ± 5°	Chk.	Kitty	Size A4	Dwg no:
.XX ±0.20	X' ± 2°	Dr.	Eddy		
.XXX ±0.10	.XX' ± 1°	Date.	2007.09.12	Scale 1:1	Sheet 1/1
Projection					