
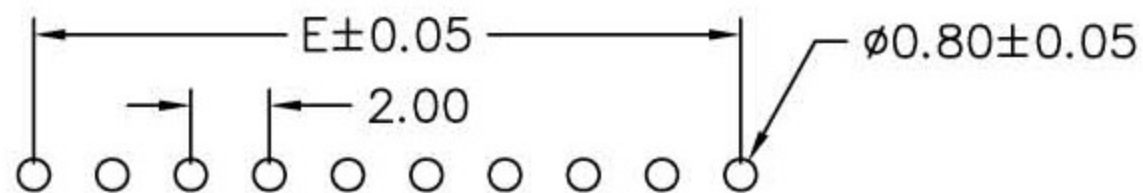
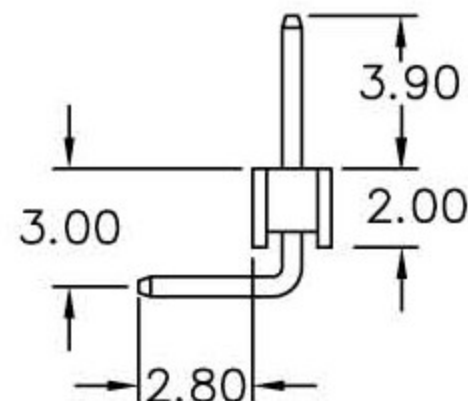
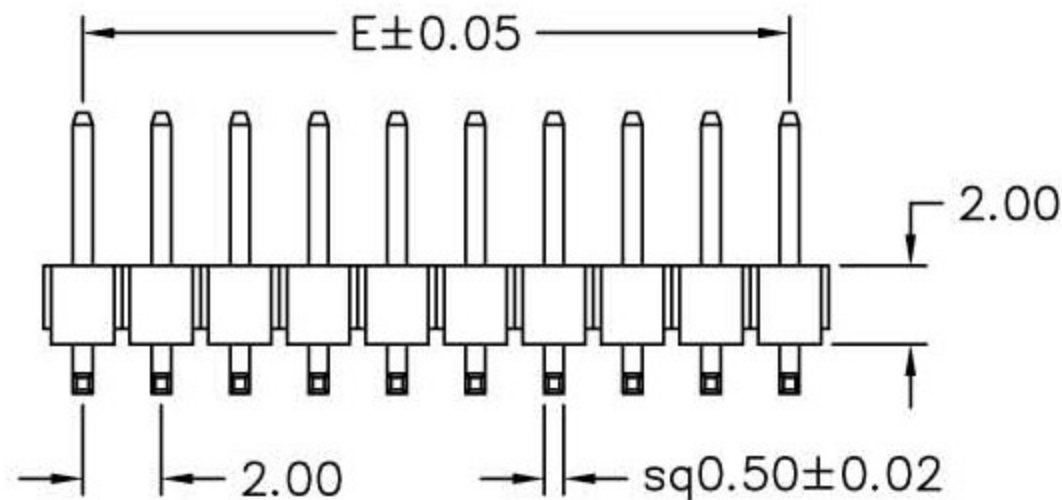


# RoHS

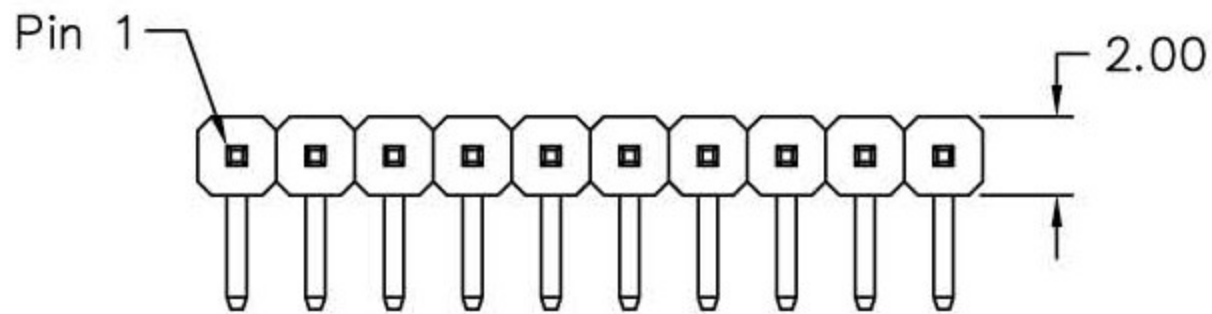

Recommended P.C.B Layout

### MATERIAL

Insulator : 30% Glass fiber PBT  
Contact Pin : Brass

### SPECIFICATION

Current Rate : 1 AMP  
Insulation Resistance : 5000MΩMin. at DC 500V  
Contact Resistance : 20mΩMax. at DC 100mA  
Dielectric Voltage : AC 500V for one minute  
Operation Temperature : -40°C to + 105°C

RoHS Compliant

POLES	DIM E	POLES	DIM E
		21	40.00
2	2.00	22	42.00
3	4.00	23	44.00
4	6.00	24	46.00
5	8.00	25	48.00
6	10.00	26	50.00
7	12.00	27	52.00
8	14.00	28	54.00
9	16.00	29	56.00
10	18.00	30	58.00
11	20.00	31	60.00
12	22.00	32	62.00
13	24.00	33	64.00
14	26.00	34	66.00
15	28.00	35	68.00
16	30.00	36	70.00
17	32.00	37	72.00
18	34.00	38	74.00
19	36.00	39	76.00
20	38.00	40	78.00

立原科技有限公司 Easy Show Technology Corp.		Title: Pin Header 2.0mm Single Row Right Angle Type	
Tolerances		App. Dabbie	Units <input checked="" type="checkbox"/>
Linear	Angles	Chk. Kitty	Part no:
.X ±0.30	X' ±5°	Dr. Eddy	Size A4
.XX ±0.20	X' ±2°	Date. 2007.09.12	Dwg no:
.XXX ±0.10	.XX' ±1°	Scale 1:1	Sheet 1/1
Projection			