RoHS

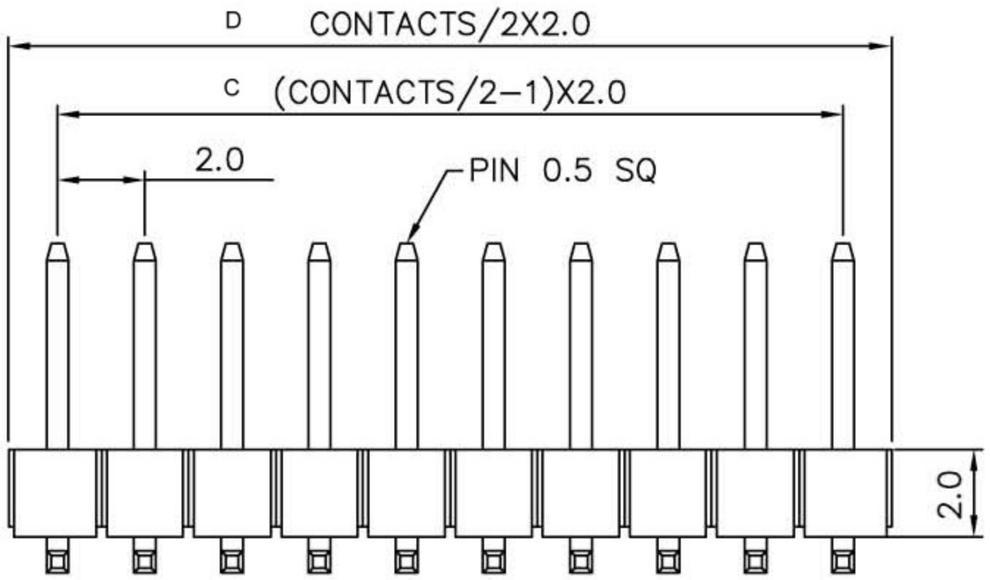

Recommended P.C.Board Layout

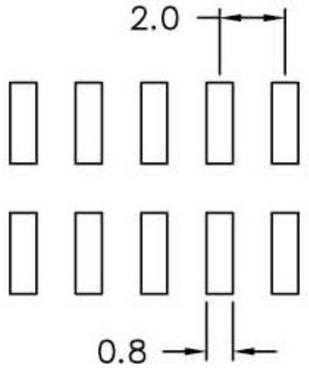

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600VAC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Copper alloy
Insulator Material:Polyester, UL94V−0
NYLON−6T

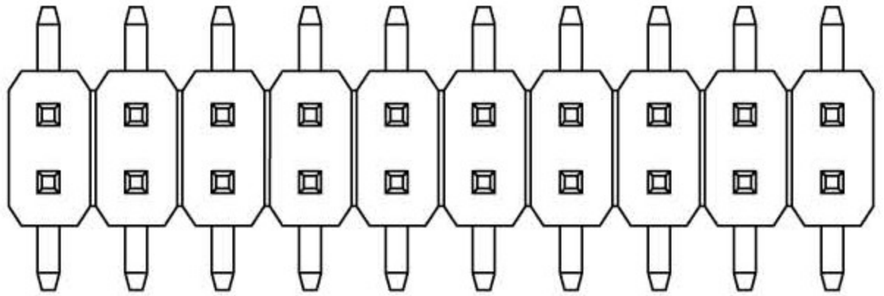

No. of Pins/Row	Dimension Information	
	C	D
03	4.00	6.20
04	6.00	8.20
05	8.00	10.20
06	10.00	12.20
07	12.00	14.20
08	14.00	16.20
09	16.00	18.20
10	18.00	20.20
11	20.00	22.20
12	22.00	24.20

No. of Pins/Row	Dimension Information	
	C	D
13	24.00	26.20
14	26.00	28.20
15	28.00	30.20
16	30.00	32.20
17	32.00	34.20
18	34.00	36.20
19	36.00	38.20
20	38.00	40.20
21	40.00	42.20
22	42.00	44.20

No. of Pins/Row	Dimension Information	
	C	D
23	44.00	46.20
24	46.00	48.20
25	48.00	50.20
26	50.00	52.20
27	52.00	54.20
28	54.00	56.20
29	56.00	58.20
30	58.00	60.20
31	60.00	62.20
32	62.00	64.20

No. of Pins/Row	Dimension Information	
	C	D
33	64.00	66.20
34	66.00	68.20
35	68.00	70.20
36	70.00	72.20
37	72.00	74.20
38	74.00	76.20
39	76.00	78.20
40	78.00	80.20

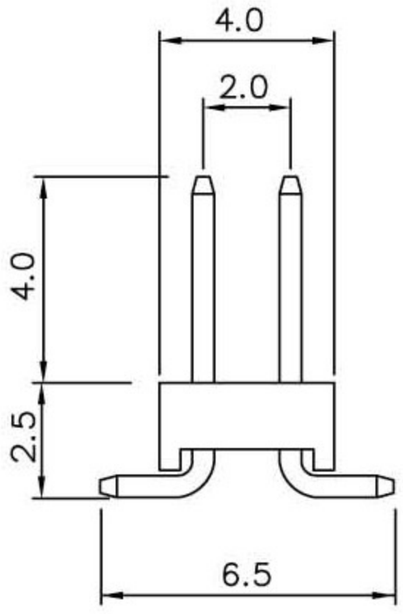

立原科技有限公司
Easy Show Technology Corp.

Title: Pin Header 2.0mm H:2.0
Daul Row, SMD Type

Tolerances					
Linear		Angles			
.X	±0.30	X°	± 5°	App.	Dabbie
.XX	±0.20	X°	± 2°	Chk.	Kitty
.XXX	±0.10	.XX°	± 1°	Dr.	Eddy
Projection				Date.	2007.09.12

Units	Part no:
☑ ☐	
Size A4	Dwg no:
Scale 1:1	Sheet 1/1