
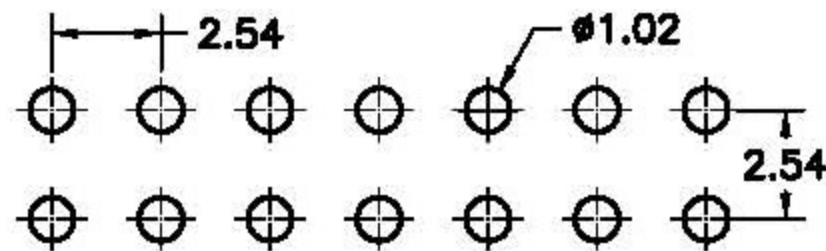
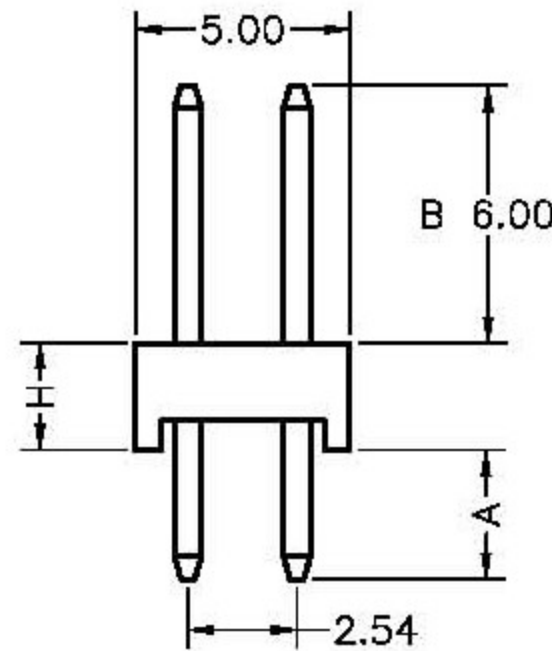


RoHS

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT

Contact Material : Brass
 Contact plating : Au over 50u" Ni

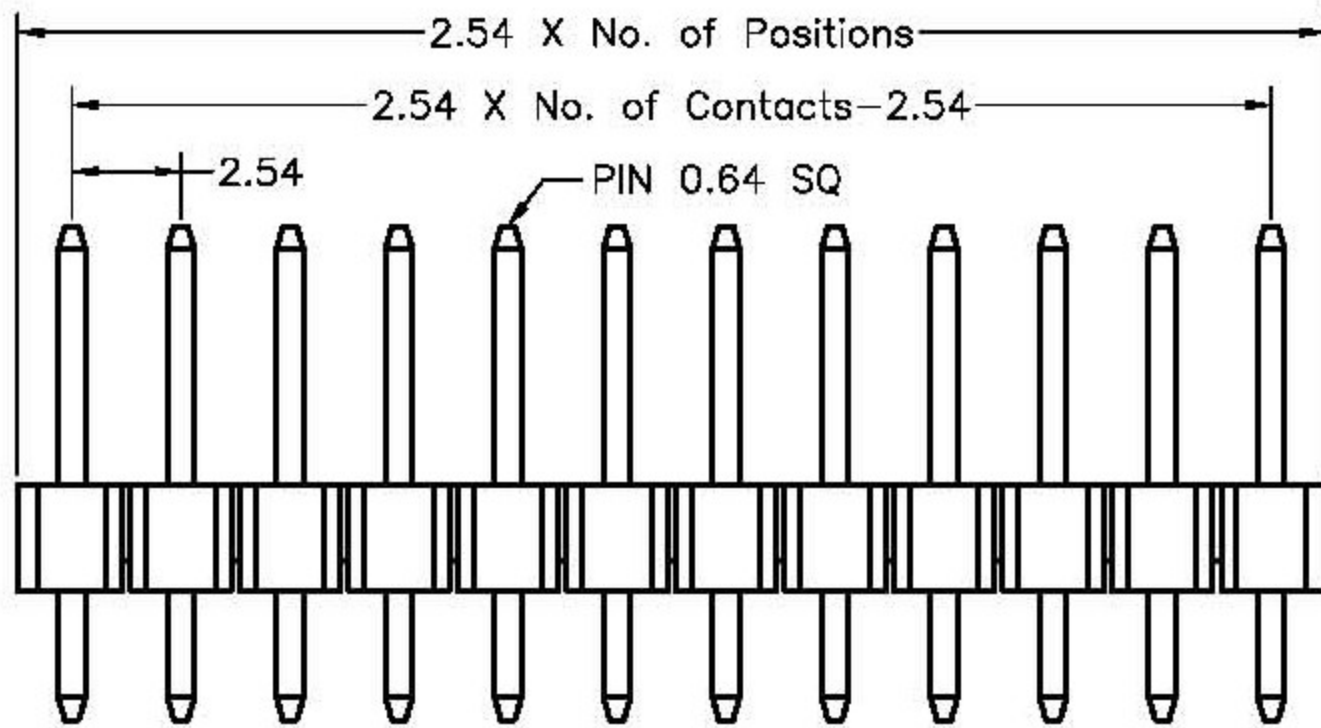

PCB LAYOUT

| | | | | |
|--|----------|------------------|---|-----------|
| 立原科技有限公司 Easy Show Technology Corp. | | | Title: Pin Header Pitch 2.54mm 雙排, 180度, DIP Type | |
| Tolerances | | App. Dabbie | Units | Part no: |
| Linear | Angles | Chk. Kitty | <input checked="" type="checkbox"/> mm <input type="checkbox"/> inch | |
| .X ±0.30 | X' ±5° | Dr. Eddy | Size A4 | Dwg no: |
| .XX ±0.20 | X' ±2° | Date. 2007.09.12 | Scale 1:1 | Sheet 1/1 |
| .XXX ±0.10 | .XX' ±1° | | | |
| Projection | | | | |