
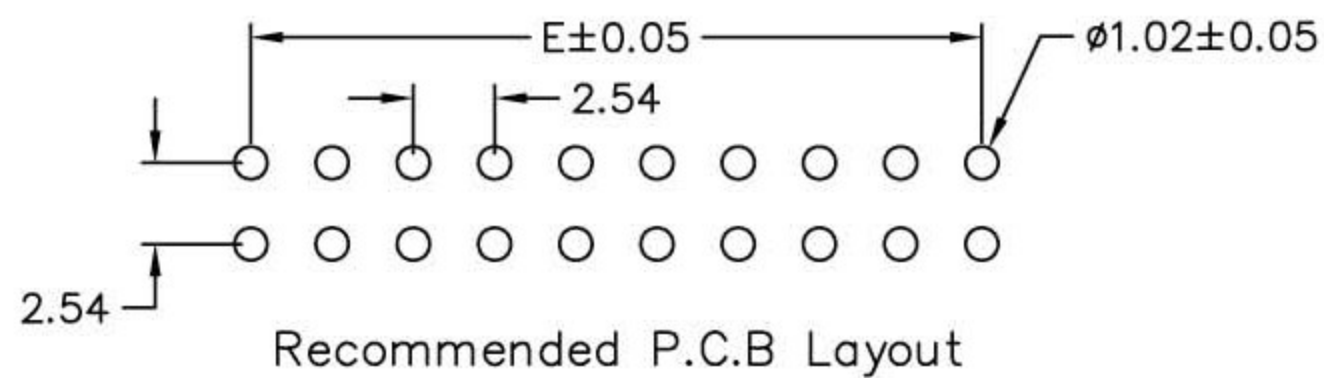
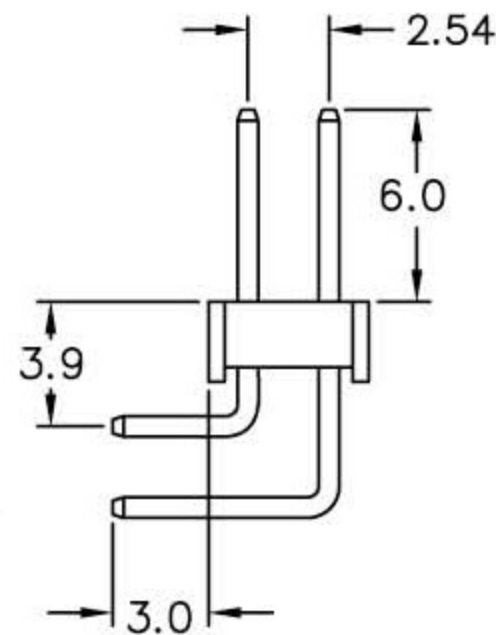
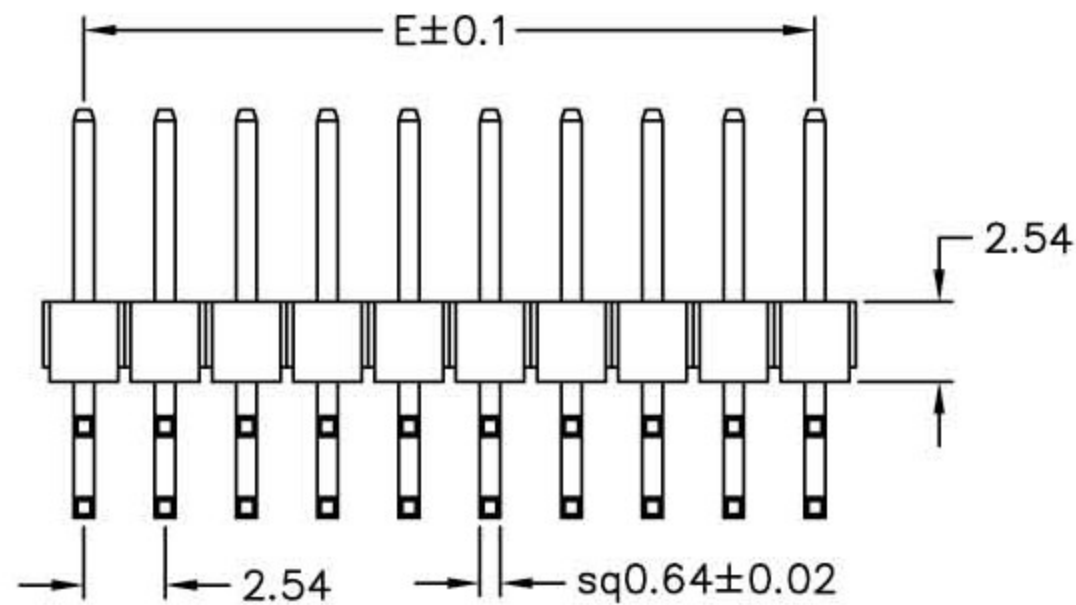


# RoHS

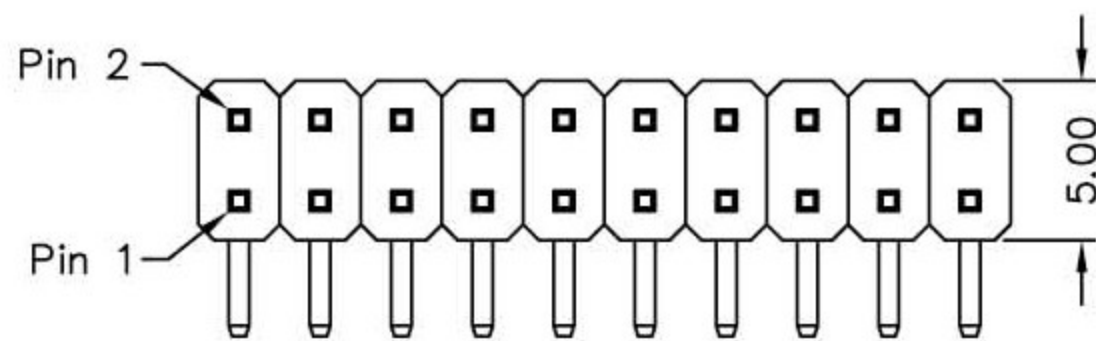

## SPECIFICATIONS

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

## MATERIAL

Insulator : Nylon 6T

Contact Pin : Brass

| POLES | DIM E | POLES | DIM E |
|-------|-------|-------|-------|
|       |       | 21    | 50.80 |
| 2     | 2.54  | 22    | 53.34 |
| 3     | 5.08  | 23    | 55.88 |
| 4     | 7.62  | 24    | 58.42 |
| 5     | 10.16 | 25    | 60.96 |
| 6     | 12.70 | 26    | 63.50 |
| 7     | 15.24 | 27    | 66.04 |
| 8     | 17.78 | 28    | 68.58 |
| 9     | 20.32 | 29    | 71.12 |
| 10    | 22.86 | 30    | 73.66 |
| 11    | 25.40 | 31    | 76.20 |
| 12    | 27.94 | 32    | 78.74 |
| 13    | 30.48 | 33    | 81.28 |
| 14    | 33.02 | 34    | 83.82 |
| 15    | 35.56 | 35    | 86.36 |
| 16    | 38.10 | 36    | 88.90 |
| 17    | 40.64 | 37    | 91.44 |
| 18    | 43.18 | 38    | 93.98 |
| 19    | 45.72 | 39    | 96.52 |
| 20    | 48.26 | 40    | 99.06 |

立原科技有限公司  
Easy Show Technology Corp.

Title: Pin Header Pitch 2.54mm  
雙排, 90度, DIP Type

| Tolerances |           | App.  | Dabbie     | Units                               | Part no:  |
|------------|-----------|-------|------------|-------------------------------------|-----------|
| Linear     | Angles    | Chk.  | Kitty      | <input checked="" type="checkbox"/> |           |
| .X ±0.30   | X' ± 5°   | Dr.   | Eddy       | <input type="checkbox"/>            |           |
| .XX ±0.20  | X' ± 2°   | Date. | 2007.09.12 | Size A4                             | Dwg no:   |
| .XXX ±0.10 | .XX' ± 1° |       |            | Scale 1:1                           | Sheet 1/1 |
| Projection |           |       |            |                                     |           |