

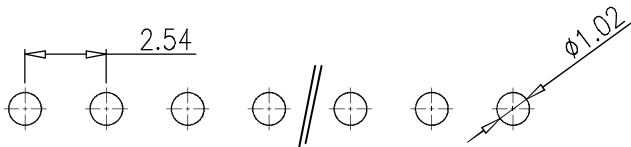
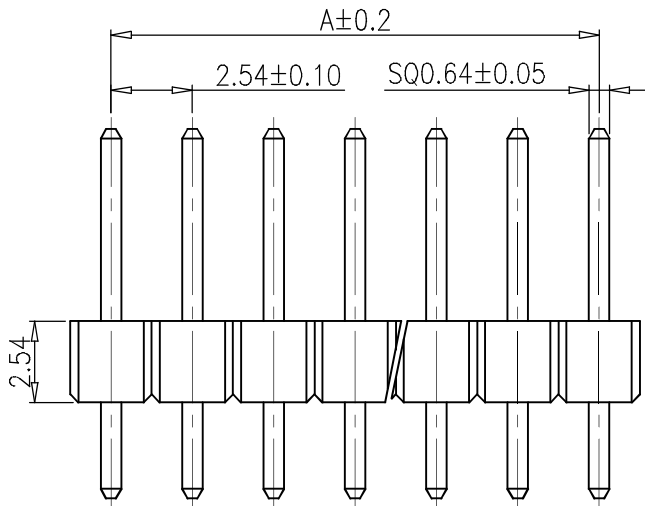


pin	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.6

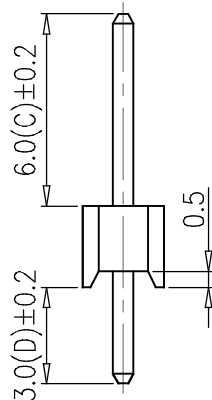

P.C.B LAYOUT

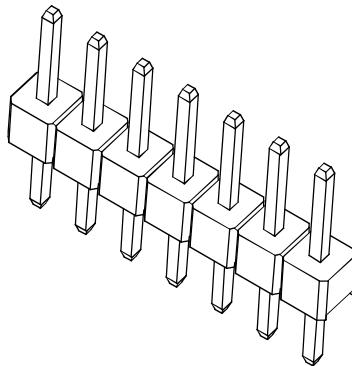

REV.	ECN NO.	LOCTIONS.	DESCRIPTION	DATE	CHANGER
A				08-08-11	

Specification

Rated Voltage:	250V AC/DC
Rated Current:	3A AC/DC
Contact Resistance:	20mohms max
Insulator Resistance:	5000Megohms/Min.
Dielectric Withstanding:	1000V AC
Operating Temperature:	-40°C~+105°C
Plastic Material:	LCP+30%GF,UL94V-0,Black
Contact Material:	Brass
Finish:	Gold Flash Plated

Ordering information

1	-	101	2	XX	S	G-C	D	C
								C:材料为LCP
								D:3.0
								C:6.0
								G:镀金
								S:180度直脚
								XX:01-40P
								2:PH2.54
								101:单排单层
								1:成品

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1012XX-0254B	2.54mm??1xNP,???2.54(LCP)	1PCS
2	5-Q064x116S-G	0.64?????,180°11.6	NPCS

立原科技有限公司 Easy Show Technology Corp.			
TOLERANCE UNSPECIFIED: X. ±0.50 X.X ±0.25 X.XX ±0.10 X.XXX ±0.05 X.* ±2° X.X* ±1°	DRAWN BY : ???	DATE : 10-12-24	TITLE: 成品规格图
			PART NAME: 2.54mm Pin Header
PROJECTION: 	CHECKED BY: ???	DATE : 10-12-24	PART NO. 1-1012XXSG-060030C
			MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: ???	DATE : 10-12-24	DRAW NO. A-1-1012XXSG-060030C
			SHEET 1 OF 1