
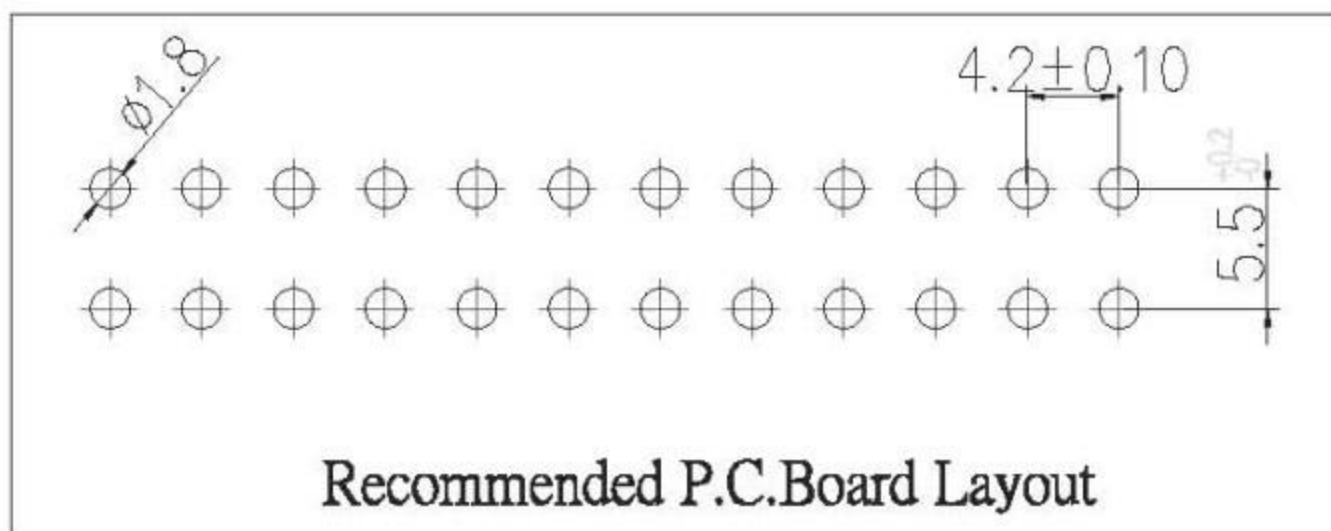
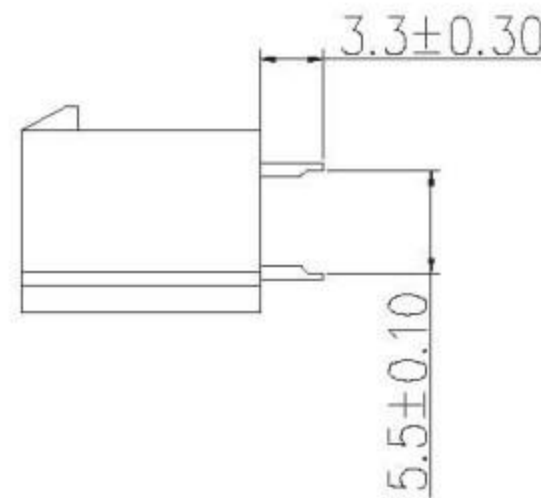
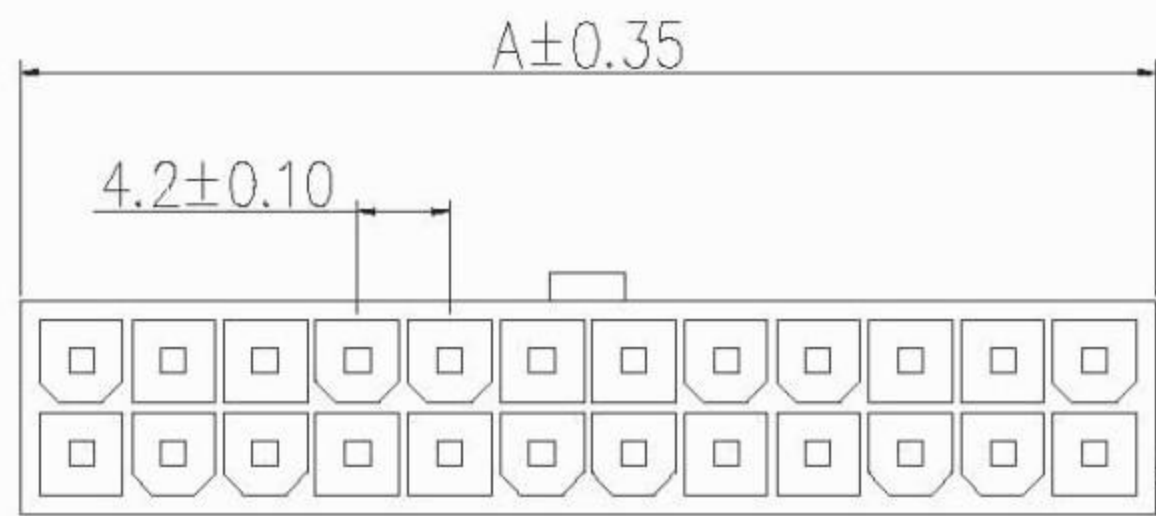


RoHS

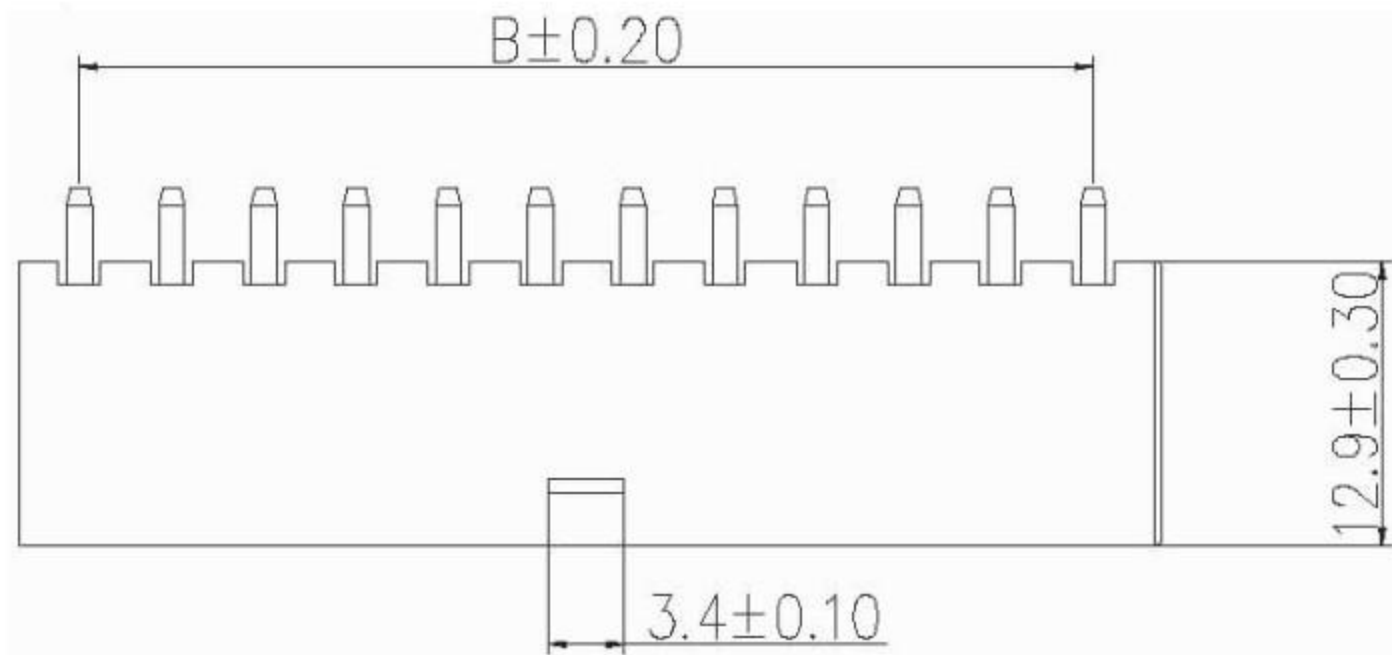

NOTES:

1. INSULATION MATERIAL:
 NYLON 66 UL94V-2
 NYLON 66 UL94V-0
2. INSULATION COLOR:
 NATURE
3. CONTACT:
 1.14mm(.045") TIN PLATED SQUARE PIN
 PRE-TINNED COPPER ALLOY
 C2600, HARDNESS: 3/4 H
4. PLATING:
 MIN. 100 MICRO INCH TIN-LEADER OVER
 50 MICRO INCH NICKEL

DIMENSIONS

Co.Of Contact	A	B
2	5.4	
4	9.6	4.20
6	13.9	8.40
8	18.1	12.60
10	22.3	16.80
12	26.5	21.00
14	30.8	25.20
16	35.0	29.40
18	39.2	33.60
20	43.4	37.80
22	47.6	42.00
24	51.8	46.20

立原科技有限公司
 Easy Show Technology Corp.

Title: wafer Mini Fit Pitch 4.2mm

Tolerances		App.	Dabbie	Units	Part no:
Linear	Angles	Chk.	Kitty	<input checked="" type="checkbox"/> mm <input type="checkbox"/> inch	
.X ±0.30	X' ± 5°	Dr.	Eddy	Size	Dwg no:
.XX ±0.20	X' ± 2°	Date.	2007.09.12	A4	
.XXX ±0.10	.XX' ± 1°			Scale	Sheet
Projection				1:1	1/1